

Corepro InstantFit (UL Type-A) T8

14T8/COR/48-830/IF20/G/DIM 10/1

The CorePro InstantFit LED lamps provide hassle-free installation with simple lamp-for-lamp replacements. They deliver what we promise, with at least 40% energy savings, flicker-free performance, and the life you would expect. Other lamps claim compatibility but only CorePro InstantFit (UL Type A) has been proven to work with over 200 ballasts and drivers, delivering even light output, with proven energy savings and a long average lifetime. End users will be delighted being under these comfortable and high quality CorePro InstantFit lamps with no visible flicker and optimized optics. Energy managers will enjoy these lamps too as they can count the savings delivered by our lamps. To enjoy more energy savings, the CorePro InstantFit lamps can be paired with the Advance TLED drivers to create a Type C system.

Product data


General Information		Color rendering index (CRI)	
Lighting Technology	LED	82	
Switching Cycle	50,000	LLMF At End Of Nominal Lifetime (Nom) 70 %	
Nominal lifetime	70,000 hour(s)		
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		
Light Technical		Operating and Electrical	
Color Code	830 [CCT of 3000K]	Line Frequency	25000-105000 Hz
Beam Angle (Nom)	240 degree(s)	Input Frequency	25000-105000 Hz
Luminous Flux	2,000 lumen	Power Consumption	14 W
Color Designation	White (WH)	Wattage Equivalent	32 W
Correlated Color Temperature (Nom)	3000 K	Starting Time (Nom)	0.5 s
Luminous Efficacy (rated) (Nom)	142.86 lm/W	Warm-up time to 60% light	0.5 s
Color Consistency	<6	Power Factor (Fraction)	0.9
		Voltage (Nom)	120-277, 347 V

Corepro InstantFit (UL Type-A) T8

Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,200 mm
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Saving Product	Yes
Approval Marks	UL certificate RoHS compliance DLC compliance


Energy Consumption kWh/1000 h	- kWh
Energy Certifications	DLC Standard
EU RoHS compliant	Yes
Product Data	
Order product name	14T8/COR/48-830/IF20/G/DIM 10/1
Order code	470096
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material number (12NC)	929001343034
Full product name	14T8/COR/48-830/IF20/G/DIM 10/1
EAN/UPC - Case	50046677470093

Dimensional drawing

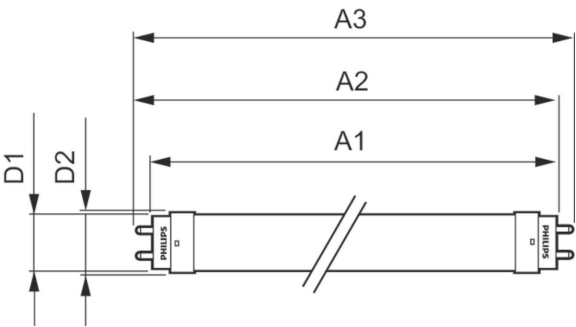


Product	D1	D2	A1	A2	A3
14T8/COR/48-830/IF20/G/DIM 10/1	25.7 mm	28 mm	1,198 mm	1,205 mm	1,212 mm

Photometric data




Light Distribution Diagram - 14T8/COR/48-830/IF20/G/DIM 10/1

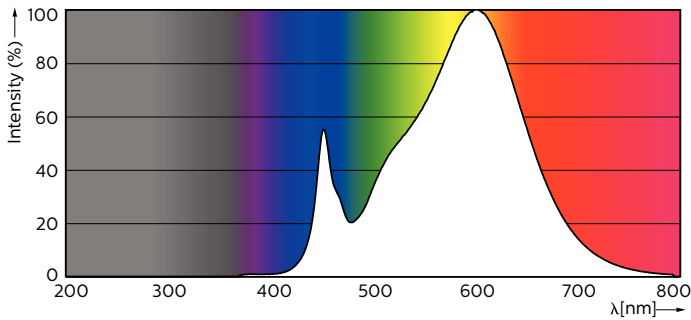


Spectral Power Distribution Colour - 14T8/COR/48-830/IF20/G/DIM 10/1

Photometric data




Cellulose Monomer Unit	Monomer Unit	Monomer Unit
------------------------	--------------	--------------

Lifetime

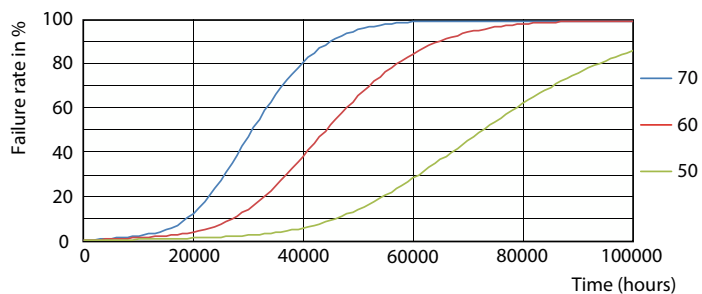

Tc (°C)	Lumen (%)
50	100
55	99.2
60	98.4
65	97.6
70	96.8

Lumen Maintenance Diagram - 14T8/COR/48-830/IF20/G/DIM 10/1

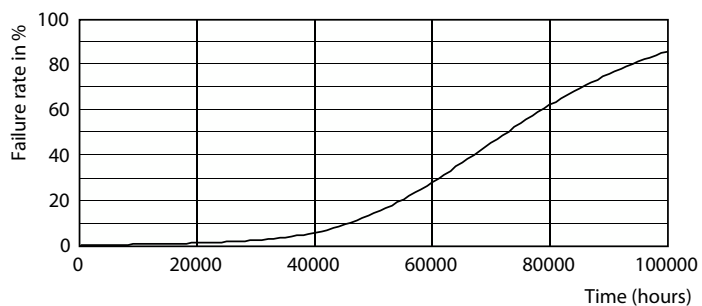


Tc (°C)	B10L70 Life time (Hours)	B50L70 Life time (Hours)
50	45,000	70,000
55	36,000	58,000
60	27,000	44,000
65	23,000	37,000
70	19,000	30,000

Life Expectancy Diagram - 14T8/COR/48-830/IF20/G/DIM 10/1

Corepro InstantFit (UL Type-A) T8

Lifetime

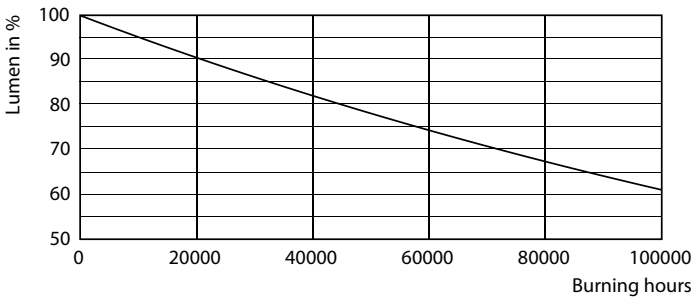

Lumen Maintenance Diagram - 14T8/COR/48-830/IF20/G/DIM 10/1

