
Current Regulator Series

CN-H2835



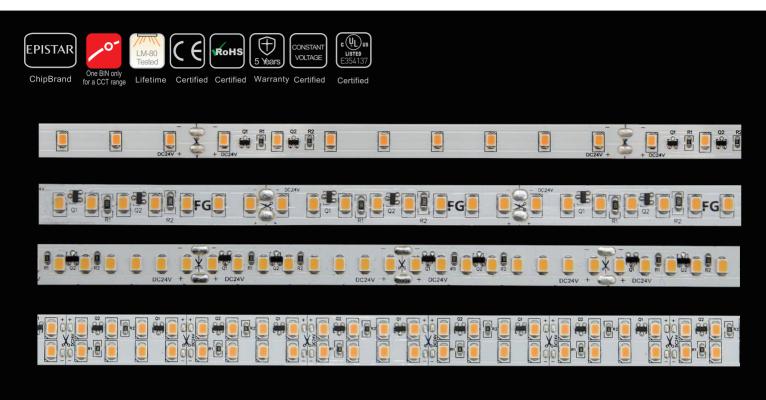

Features

- Efficacy up to 130Lm/W
- No current decay for constant brightness
- Optional for outdoor (IP68, IP67 and IP65)
- 5 years warranty

Application

Landscape lighting, floor outline, stair, bridge, yard etc.

Installation

Heat-conductive adhesive tape(Heat sink is necessary)

BLUEVIEW ELEC-OPTIC TECH CO.,LTD

Tel: +86-28-8148 0011 Fax: +86-28-8148 1258 Mail: sales@blueviewled.com Web.: www.blueviewled.com Add: No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Chengdu, Sichuan, China. Zip code: 610207

Specifications are subject to change without notice. Blueview™ 2018– All rights reserved. Made in China.




Specifications

Model No.	CN-H2835-240-24	CN-H2835-160-24	CN-H2835-128-24	CN-H2835-64-24
LED Type	SMD 2835			
LED Q'ty/m Input Voltage	240pcs	160pcs 24V DC Cons	128pcs	64pcs
Power	21.6 W/m	14.4 W/m	11.52 W/m	7.68W/m
Strip Width	14mm	10mm	10mm	10mm
Cutting Length	33.3mm, 8 LEDs	50mm, 8 LEDs	62.5mm, 8 LEDs	125mm, 8 LEDs
Viewing Angle	120°			
Dimmable	Yes (compatible with BV311 RF diammer & BV dimmer)			
IP Grade	IP22 (IP65 &IP67&IP68available upon request)			
Working Temperature	-25~+60℃			
Max run	7.5 metrs (single feed)	5. 5 metrs (single feed)	7 metrs (single feed)	9.5 metrs (single feed)
Certification	CE, RoHs			
Warranty	5 Years			

Dimension

Unit:mm[in]

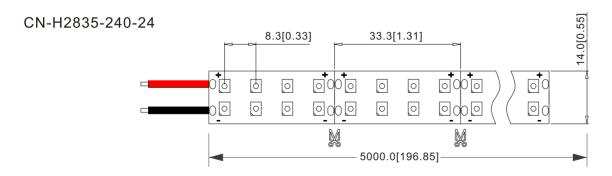


BLUEVIEW ELEC-OPTIC TECH CO.,LTD


Fax: +86-28-8148 1258 Tel: +86-28-8148 0011 Mail: sales@blueviewled.com Web.: www.blueviewled.com Add: No.1000, Section 2, 2nd Konggang Road, Southwest Aviation Industrial Development Zone, Chengdu, Sichuan, China. Zip code: 610207 Specifications are subject to change without notice. Blueview[™] 2018– All rights reserved. Made in China.




CN-H2835-160-24

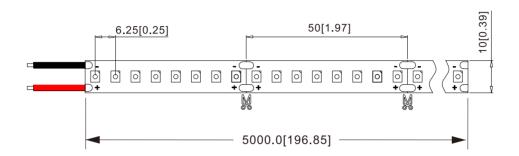

CN-H2835-128-24

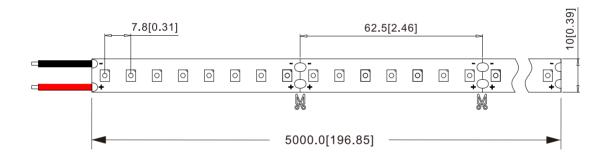


CN-H2835-64-24

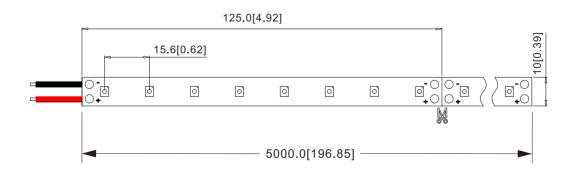

BLUEVIEW ELEC-OPTIC TECH CO.,LTD



Packaging

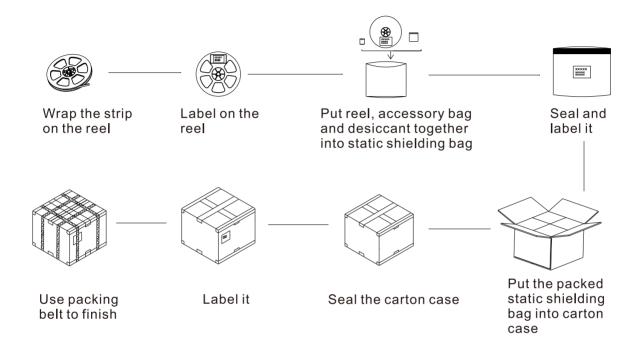

Packing Information

Order Code	Net Weight / CTN	Gross Weight / CTN	Units / CTN	Carton Size
CN-H2835-240-24	8.4(1±10%) kgs	13.4 (1±10%) kgs	70 rolls	550*400*340mm
CN-H2835-160-24	8.13(1±10%) kgs	13.13 (1±10%) kgs	100 rolls	550*400*340mm
CN-H2835-128-24	8.13(1±10%) kgs	13.13 (1±10%) kgs	100 rolls	550*400*340mm
CN-H2835- 64- 24	8.13(1±10%) kgs	13.13 (1±10%) kgs	100 rolls	550*400*340mm



Order Code

Model No	CCT/Color	Ra	Lumen/M ²
CN-H2835-240-27K	2645-2805k	90+,80+	2530
CN-H2835-240-29K	2855-3025k	90+,80+	2530
CN-H2835-240-34K	3265-3535k	90+,80+	2530
CN-H2835-240-42K	3897-4223k	90+,80+	3216
CN-H2835-240-51K	4900-5300k	90+,80+	3216
CN-H2835-240-57K	5477-6020k	90+,80+	3216
CN-H2835-240-63K	6020-6530k	90+,80+	3216
CN-H2835-240-65K	6175-6825k	90+,80+	3216

CCT/Color	Ra	Lumen/M ²
2645-2805k	90+,80+	1496
2855-3025k	90+,80+	1496
3265-3535k	90+,80+	1496
3897-4223k	90+,80+	2230
4900-5300k	90+,80+	2230
5477-6020k	90+,80+	2230
6020-6530k	90+,80+	2230
6175-6825k	90+,80+	2230
	2645-2805k 2855-3025k 3265-3535k 3897-4223k 4900-5300k 5477-6020k 6020-6530k	2645-2805k 90+,80+ 2855-3025k 90+,80+ 3265-3535k 90+,80+ 3897-4223k 90+,80+ 4900-5300k 90+,80+ 5477-6020k 90+,80+ 6020-6530k 90+,80+

Model No	CCT/Color	Ra	Lumen/M ²
CN-H2835-128-24-27K	2645-2805k	90+,80+	1300
CN-H2835-128-24-29K	2855-3025k	90+,80+	1300
CN-H2835-128-24-34K	3265-3535k	90+,80+	1300
CN-H2835-128-24-42K	3897-4223k	90+,80+	1680
CN-H2835-128-24-51K	4900-5300k	90+,80+	1680
CN-H2835-128-24-57K	5477-6020k	90+,80+	1680
CN-H2835-128-24-63K	6020-6530k	90+,80+	1680
CN-H2835-128-24-65K	6175-6825k	90+,80+	1680

Model No	CCT/Color	Ra	Lumen/M ²
CN-H2835-64-24-27K	2645-2805k	90+,80+	823
CN-H2835-64-24-29K	2855-3025k	90+,80+	823
CN-H2835-64-24-34K	3265-3535k	90+,80+	823
CN-H2835-64-24-42K	3897-4223k	90+,80+	1180
CN-H2835-64-24-51K	4900-5300k	90+,80+	1180
CN-H2835-64-24-57K	5477-6020k	90+,80+	1180
CN-H2835-64-24-63K	6020-6530k	90+,80+	1180
CN-H2835-64-24-65K	6175-6825k	90+,80+	1180