

LED LAMP

VIVID Series



LED T5 TUBE Ballast Bypass



3-year limited warranty

Operating temperature range -20 °C ~ +45 °C



Features & Benefits

cULus listed

Replacement for T5 HO & T5 HE linear fluorescent, 120-277V/ 347V

External ballast not required, use existing lamp holders (non-shunted / shunted)

Double-ended installation, surge protection

Our safety features allow for installation as well as misapplication protection¹


NSF/ANSI 2 certified²

Beam angle 180°, High CRI (83+)

50,000 hour life (L70)

¹Contact your local Turolight representative for detail ² Shatterprotect utilizes PET film to reduce the unexpected risk of shattering

Dimensional Drawing

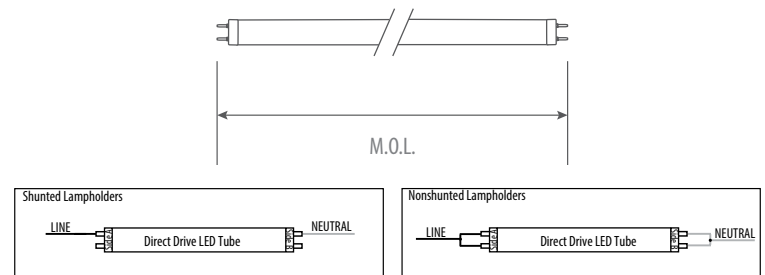

Ordering Information Example: VIV-T5BSP4/25W/30/F/347V

Family Name	Lamp Type	Wattage	CCT	Frost	Voltage
VIV (Vivid)	T5BSP4 (Bypass, PET film, shatterprotect)	12W, 13W 16W, 25W	30 (3000K) 35 (3500K) 40 (4000K) 50 (5000K)	F (Frost)	347V Blank (120-277V)

Product Specification

Ordering Code	Model Number	Wattage (W)	Voltage (V)	Base	Hour Rating	Beam Angle	Initial Lumen (lm)	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
Replace T5 HO											
1752311	VIV-T5BSP4/12W/35/F (2FT HO)	12	120-277	G5	50,000	180	1450	3500	83	22	8
1752423	VIV-T5BSP4/12W/40/F (2FT HO)	12	120-277	G5	50,000	180	1450	4000	83	22	8
1753300	VIV-T5BSP4/16W/35/F (3FT HO)	16	120-277	G5	50,000	180	1850	3500	83	34	8
1753401	VIV-T5BSP4/16W/40/F (3FT HO)	16	120-277	G5	50,000	180	1850	4000	83	34	8
1754200	VIV-T5BSP4/25W/30/F (4FT HO)	25	120-277	G5	50,000	180	3200	3000	83	46	25
1754300	VIV-T5BSP4/25W/35/F (4FT HO)	25	120-277	G5	50,000	180	3200	3500	83	46	25
1754402	VIV-T5BSP4/25W/40/F (4FT HO)	25	120-277	G5	50,000	180	3300	4000	83	46	25
1754500	VIV-T5BSP4/25W/50/F (4FT HO)	25	120-277	G5	50,000	180	3400	5000	83	46	25
1754201	VIV-T5BSP4/25W/30/F/347V (4FT HO)	25	347	G5	50,000	180	3200	3000	83	46	25
1754301	VIV-T5BSP4/25W/35/F/347V (4FT HO)	25	347	G5	50,000	180	3200	3500	83	46	25
1754403	VIV-T5BSP4/25W/40/F/347V (4FT HO)	25	347	G5	50,000	180	3300	4000	83	46	25
1754501	VIV-T5BSP4/25W/50/F/347V (4FT HO)	25	347	G5	50,000	180	3400	5000	83	46	25
Replace T5 HE											
1752305	VIV-T5BSP4/13W/35/F (4FT HE)	13	120-277	G5	50,000	180	1600	3500	83	46	25
1752413	VIV-T5BSP4/13W/40/F (4FT HE)	13	120-277	G5	50,000	180	1650	4000	83	46	25



Tel: 905-479-7093
Toll Free: 1-888-425-7093

Email: sales@turolight.com
Website: www.turolight.com