

LED FIXTURE

TL Series



Metal Battery Pack TL-EMRM

Steel housing battery pack



1-year limited warranty


Operating temperature range
5°C ~ +35°C



Features & Benefits

Steel housing, UL-94V-0 flame rating, fire-resistant
Input Voltage: 120 / 347V With 2x5W 6500K heads
12V / 6V sealed lead-acid battery
Test switch and charge indicator light
Not intended for outdoor use
Wall mounting, remote capable
CSA C22.2 No 141-15
IP20, damp location rated

Dimensional Drawing

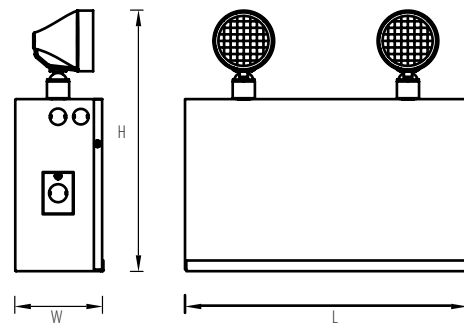

Ordering Information Example: TL-EMRM/34W/6VDC/2-5W/120/347V

Family Name	Fixture Type	Wattage	Load Voltage	LED Heads	Input Voltage
TL (Turolight)	EMRM (Emergency remote)	34W 95W 140W 275W	6VDC 12VDC	2-5W (With 2x 5W LED heads)	120/347V

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	LED Heads	Emergency Run Time (Min)	Mounting	Remote Capable	Damp Location	Dimensions LxWxH (inch)	Case QTY.
3466203	TL-EMRM/34W/6VDC/2-5W/120/347V	Metal Battery Pack (c/w 2x5W Heads) 34W, 6VDC, 120/347V	34	120/347V	2	30	Wall	Yes	Yes	11.81"×2.95"×9.72"	4
3466204	TL-EMRM/95W/12VDC/2-5W/120/347V	Metal Battery Pack (c/w 2x5W Heads) 95W, 12VDC, 120/347V	95	120/347V	2	30	Wall	Yes	Yes	12.20"×2.76"×10.63"	5
3466205	TL-EMRM/140W/12VDC/2-5W/120/347V	Metal Battery Pack (c/w 2x5W Heads) 140W, 12VDC, 120/347V	140	120/347V	2	30	Wall	Yes	Yes	13.50"×4.21"×12.52"	2
3466206	TL-EMRM/275W/12VDC/2-5W/120/347V	Metal Battery Pack (c/w 2x5W Heads) 275W, 12VDC, 120/347V	275	120/347V	2	30	Wall	Yes	Yes	15.28"×4.21"×13.70"	1

Emergency Runtime Charts

TL-EMRM/34W/6VDC/2-5W/120/347V

Emergency Run Time in Minutes	Wattage	No of additional Heads	2W	5W
30	34	12	4	
60	25	7	3	
90	18	4	1	
120	12	1	-	

TL-EMRM/95W/12VDC/2-5W/120/347V

Emergency Run Time in Minutes	Wattage	No of additional Heads	2W	5W
30	95	42	17	
60	75	32	13	
90	60	25	10	
120	40	15	6	

TL-EMRM/140W/12VDC/2-5W/120/347V

Emergency Run Time in Minutes	Wattage	No of additional Heads	2W	5W
30	140	65	26	
60	90	40	16	
90	70	30	12	
120	50	20	8	

TL-EMRM/275W/12VDC/2-5W/120/347V

Emergency Run Time in Minutes	Wattage	No of additional Heads	2W	5W
30	275	132	53	
60	200	95	38	
90	140	65	26	
120	100	45	18	

* Actual wattage loads may be affected by length and gauge of the wire runs used to connect the remote heads.
* It is recommended to load battery pack 20% under their maximum load.