



LED LAMP ARTISAN



AR-A19, AR-B10/BA10
AR-Globe, AR-ST19, AR-T10



Features & Benefits

2200K with amber glass cover

2700K, 4000K with clear or frost glass cover

Energy Star*, dimmable*, High CRI (80+)

15,000* hour average life, Damp location rated*

* For applicable models, see product specification below

Warranty & Cautions

2-year limited warranty from the date of purchase


Operating temperature between -20°C and +40°C

Ordering Information

Example: AR-G16.5/4W/27/E12/D/C

LED CLASS	LAMP TYPE	WATTAGE	CCT(K)	BASE	DIMMABLE	COVER
AR (Artisan)	A19 B10/BA10 G40, G30, G16.5 T10, T9, S14	1W 4W 5W 6W 8W	22 (2200K) 27 (2700K) 30 (3000K) 40 (4000K)	Blank (E26) E12	D (dimmable) Blank (non dimmable)	C (Clear) A (Amber) F (Frost)

Dimensional drawing

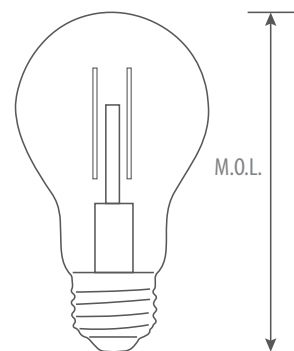

Product Specification

Ordering Code	ES	Model Number	Watts	Replacement Filament	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Beam Angle°	Initial Lumens(lm)	CCT(K)	CRI	Damp Location	M.O.L. (inch)	Case QTY.
AR-A19															
1772900	No	AR-A19/8W/22/D/A	8	75W	-	E26	120	15,000	330	640	2200	80	Y	4.29	40
1771127	Yes	AR-A19/4W/27/D/C	4	-	40W	E26	120	15,000	330	420	2700	80	Y	4.29	40
AR-B10/BA10															
1771135	Yes	AR-B10/5W/27/E12/D/C	5	-	40W	E12	120	15,000	330	500	2700	80	Y	3.78	50
1771137	Yes	AR-BA10/4W/27/E12/D/C	4	-	40W	E12	120	15,000	330	350	2700	80	Y	4.09	50
AR-Globe															
1771903	No	AR-G30/5W/22/D/A	5	60W	-	E26	120	15,000	320	400	2200	80	Y	5.31	30
1771909	No	AR-G40/5W/22/D/A	5	60W	-	E26	120	15,000	320	400	2200	80	Y	6.69	12
1772112	No	AR-G30/6W/27/D/C	6	-	60W	E26	120	15,000	330	600	2700	80	Y	5.28	20
1772113	No	AR-G30/6W/27/D/F	6	-	60W	E26	120	15,000	330	600	2700	80	Y	5.28	20
1771143	No	AR-G30/6W/30/D/C	6	-	60W	E26	120	15,000	330	600	3000	80	Y	5.28	20
1771204	No	AR-G30/6W/30/D/F	6	-	60W	E26	120	15,000	330	600	3000	80	Y	5.28	20
1771109	No	AR-G16.5/4W/27/D/C	4	-	40W	E26	120	15,000	320	400	2700	80	Y	3.07	75
1771138	Yes	AR-G16.5/5W/27/E12/D/C	5	-	40W	E12	120	15,000	330	350	2700	80	Y	3.19	50
AR-T10, T9															
1772204	NO	AR-T10/8W/30/D/C/L	8	-	60W	E26	120	20,000	330	750	3000	80	Y	11.9	100
1771301	NO	AR-T9/4W/40/D/C	4	-	40W	E26	120	15,000	330	350	4000	80	Y	5.71	50
1771907	NO	AR-T10/5W/22/D/A	5	60W	-	E26	120	15,000	320	400	2200	80	Y	4.96	72
AR-S14															
1771202	NO	AR-S14/1W/27/C	1	-	11W	E26	120	25,000	330	75	2700	80	Wet location	3.26	10/100
1771926	NO	AR-S14/1W/22/C	1	-	11W	E26	120	25,000	330	75	2200	80	Wet location	3.26	10/100