

Project:


# Thin-Line LED Wall Bar Spec Sheet

SKU: 2810.25-8

A system of minimally scaled LED uplight/downlight wall bars, indirect light wall bars, and pendants. Thin-Line is offered in a variety of lengths, finishes, and lighting configurations. One-sided configurations direct light in a single direction, and can be mounted in an uplight or downlight orientation. Two-sided configurations direct light both up and down.

Learn more: <https://sonnemanlight.com/thin-line-led-wall-bar>

Type #:

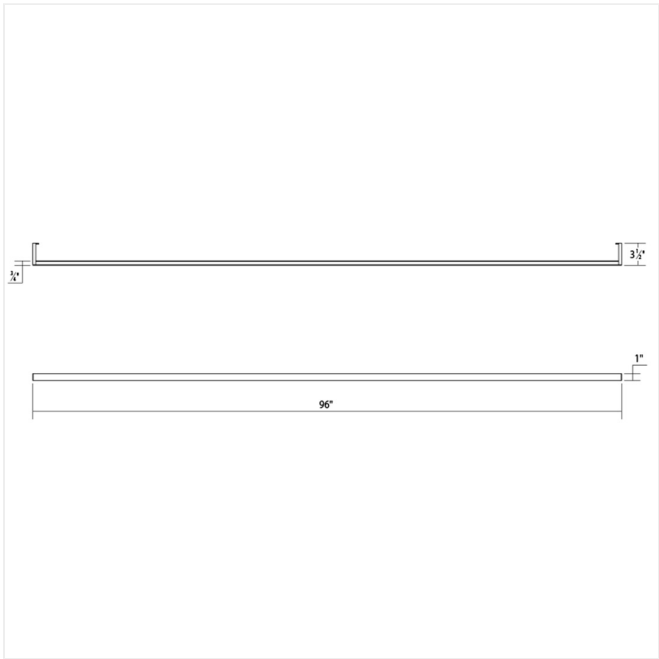

## Dimensions

Height:	1"
Width:	96"
Extends:	3.5"
Minimum Extension:	3.5"
Maximum Extension:	3.5"
Size:	8' One-Sided
Canopy/Backplate/Base Width:	1"
Canopy/Backplate/Base Height:	1"

## Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	1
Input Voltage:	120VAC
Wattage:	47
Initial Lumens:	3120
Delivered Lumens:	1800
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Remote
Dimming Type:	TRIAC/ELV
Bulb Max Wattage:	47

## Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Adapter Available up to 45°
Installation Orientation:	Any Orientation

## Shipping

Carton 1 L x W x H:	99" X 7" X 4"
Carton 1 Gross Weight:	6 LBS

## Shade

Shade Material:	Aluminum w/Optical Acrylic
-----------------	----------------------------

## General Listings

Features:	Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin Black (.25)

## Available Finishes

Available Finishes:	Bright Satin Aluminum (.16), Satin Black (.25), Satin White (.03)
---------------------	---

## Available Color Temperatures

Available Color Temperatures:	2700K, 3000K, 3500K
-------------------------------	---------------------