



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

TRAC 12, TRAC 12/25

Miniature Low Voltage Trac System

12V REMOTE MOUNT MAGNETIC TRANSFORMERS

TL575, TL549N, TL550N, TL554N and TF5150

PRODUCT SPECIFICATIONS

Description

TL575-20-BL: 12V-20VA Remote Magnetic Transformer • Rated for 0.5-20 watts for incandescent or LED loads • 120VAC input.

TL575-20-277-BL: Same as above with 277VAC input.

TL575-40-BL: 12V-40VA Remote Magnetic Transformer • Rated for 0.5-40 watts for incandescent or LED loads • 120VAC input.

TL575-40-277-BL: Same as above with 277VAC input.

TL575-75-BL: 12V-75VA Remote Magnetic Transformer • Rated for 0.5-75 watts for incandescent or LED loads • 120VAC input.

TL575-75-277-BL: Same as above with 277VAC input.

TL554N-BL: 12V-150VA Remote Magnetic Transformer • Rated for 50-150 watts for incandescent loads, 75-150 watts for LED loads • 120VAC input.

TL554N-277-BL: Same as above with 277VAC input.

TL549N-BL: 12V-240VA Remote Magnetic Transformer • Rated for 120-240 watts for incandescent or LED loads • 120VAC input.

TL549N-277-BL: Same as above with 277VAC input.

TL550N-BL: 12V-480VA Dual Circuit Remote Magnetic Transformer • Contains two 240VA circuits, each rated for 120-240 watts for incandescent or LED loads • 120VAC input.

TL550N-277-BL: Same as above with 277VAC input.

TF5150BL: 12V-150VA Remote Magnetic Transformer • Rated for 50-150 watts for incandescent loads, 75-150 watts for LED loads • 120VAC input • Similar to TL549N but with terminal block wiring connections to facilitate installation.

TF5150BL-277: Same as above with 277VAC input.

Construction Potted core and coil • 13 volt boost tap • Thermally protected primary • Manually resettable, fast-acting magnetic circuit breaker on secondary • Primary and secondary circuits physically and electrically isolated.

Circuit Breaker Resettable magnetic circuit breaker • Provides faster short circuit protection than standard thermal circuit breakers • Provides overload protection which is unaffected by ambient operating conditions • Eliminates false overload failures due to elevated ambient temperatures which can occur with thermal circuit breakers • Enables transformer to be mounted in any position.

Dimming 120V installations only – consult factory for 277V dimming applications • Incandescent loads can be dimmed with high quality dimmers designed specifically for use with magnetic transformer • LED loads may be dimmed using only dimmers that have been tested and qualified by Juno for use with Juno LED fixtures including: Lutron Diva DVLV-600P, Lutron Nova NLV-600, Lutron Ceana CNLV-600P, Lutron Skylark SILV-600P – consult factory to confirm compatibility of other dimmers prior to installation with Juno LED fixtures.

Installation Easy access front located wiring compartment • Wire nut terminations for input and output circuits (except TF5150) • Operate in accessible locations with ambient temperatures below 140° F.

Labels UL/CUL listed.

Product specifications subject to change without notice.

OPTIONS


(Add as suffix to catalog number)

Catalog Number	Description
-CP6	6ft. Cord & Plug (120VAC Only), factory installed

Ordering Example: TL554N-BL-CP6

REV-8/09

DIMENSIONS



TRANSFORMER DIMENSIONS			
Catalog Number	Length (L)	Width (W)	Depth (D)
TL575-XX-BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TL575-XX-277-BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TL554N-BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TL554N-277-BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TL549N-BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TL549N-277-BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TL550N-BL	11 ³ / ₈ "	5 ³ / ₈ "	5 ¹ / ₈ "
TL550N-277-BL	11 ³ / ₈ "	5 ³ / ₈ "	5 ¹ / ₈ "
TF5150BL	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "
TF5150BL-277	10 ³ / ₄ "	4 ³ / ₈ "	4 ¹ / ₈ "

PRODUCT CODES

Catalog Number	Finish	Input Voltage	Description
TL575-20-BL	Black	120VAC	20W Magnetic 12V Transformer
TL575-20-277-BL	Black	277VAC	20W Magnetic 12V Transformer
TL575-40-BL	Black	120VAC	40W Magnetic 12V Transformer
TL575-40-277-BL	Black	277VAC	40W Magnetic 12V Transformer
TL575-75-BL	Black	120VAC	75W Magnetic 12V Transformer
TL575-75-277-BL	Black	277VAC	75W Magnetic 12V Transformer
TL554N-BL	Black	120VAC	150W Magnetic 12V Transformer
TL554N-277-BL	Black	277VAC	150W Magnetic 12V Transformer
TL549N-BL	Black	120VAC	240W Magnetic 12V Transformer
TL549N-277-BL	Black	277VAC	240W Magnetic 12V Transformer
TL550N-BL	Black	120VAC	480W Magnetic 12V Transformer (Dual Circuit)
TL550N-277-BL	Black	277VAC	480W Magnetic 12V Transformer (Dual Circuit)
TF5150BL	Black	120VAC	150W Magnetic 12V Transformer
TF5150BL-277	Black	277VAC	150W Magnetic 12V Transformer

TRAC 12

Miniature Low Voltage Trac System

12V AC REMOTE MOUNT MAGNETIC TRANSFORMERS

TL575, TL549N, TL550N, TL554N and TF5150

APPLICATION

Consideration

	12V Magnetic Transformer	12V Electronic Driver/Transformer
• Trac run length	• Use for medium to long run lengths and medium to high wattage systems	• Use for short to medium run lengths and low to medium wattage systems
• Dimming	• For optimal results, use dimmers specifically designed for use with magnetic transformers; transformers used with Juno LED fixtures should only be operated with dimmers pre-qualified for suitability by Juno Engineering	• For optimal results, use dimmers specifically designed for use with electronic transformers; transformers used with Juno LED fixtures should only be operated with dimmers pre-qualified for suitability by Juno Engineering
• Transformer Location	• Install in well ventilated locations where ambient temperature will not exceed 140°F (60°C); transformers must be accessible.	• Install surface mount units in well-ventilated location where ambient temperature will not exceed 120°F (50°C)

VOLTAGE DROP CALCULATIONS (FOR MAGNETIC TRANSFORMERS)

Voltage drop is a function of the following factors:

Wire Length:

As the wire length from the supply to the fixture becomes longer, voltage drop increases.

Wire Diameter:

As the wire cross-sectional area becomes smaller, voltage drop increases (this is related to the resistance per foot of wire).

Amperage of the Electrical Load:

As the amperage of the electrical load increases, voltage drop also increases.

Voltage drop in 12 volt systems is 10 times greater than in 120 volt systems.

This is because a load of the same wattage has 10 times greater amperage in 12 volts as compared to 120 volts.

This is illustrated by the formula:


$$\text{WATTS} = \text{VOLTS} \times \text{AMPS}$$

Assuming a 120 watt electrical load:

$$120 \text{ WATTS} = 12 \text{ VOLTS} \times \underline{10 \text{ AMPS}}$$

$$120 \text{ WATTS} = 120 \text{ VOLTS} \times \underline{1 \text{ AMP}}$$

Voltage drop from a magnetic transformer to the first lampholder on 12V Trac 12 can be calculated as follows:

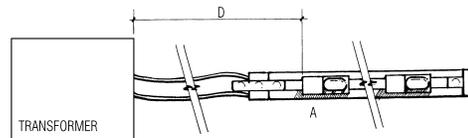

$$\text{VOLTAGE DROP} = 2D \times A \times \Omega$$

WHERE:

D = Distance in feet from transformer to 1st lamp

A = Total amperage load of all lampholders on the trac

$$(A = \frac{\text{WATTS}}{\text{VOLTS}} = \frac{\text{WATTS}}{12})$$

Ω = Resistance per foot of wire per the following chart:

Wire Gauge	Resistance Per Foot of Wire (OHMS)
#8	.00065
#10	.00104
#12	.00166

TRAC 12

Miniature Low Voltage Trac System

12V AC REMOTE MOUNT MAGNETIC TRANSFORMERS

TL575, TL549N, TL550N, TL554N and TF5150

TRAC 12 12V VOLTAGE DROP INFORMATION (for 75VA Remote Mount Magnetic Transformers)

Table predicting voltage at first lamp for various wire lengths, gauges, inputs and loads

Distance from Transformer to 1st Lamp	Standard Tap						Boost Input			
	12V, 6.3A, 75W		12V, 3.3A, 40W		12V, 1.7A, 20W		12V, 6.3A, 75W		12V, 3.3A, 40W	
	#12	#10	#12	#10	#12	#10	#12	#10	#12	#10
5'	11.53	11.56	11.71	11.73	11.89	11.90	12.18	12.21	12.43	12.46
10'	11.46	11.51	11.66	11.70	11.87	11.88	12.09	12.15	12.37	12.43
15'	11.39	11.47	11.62	11.67	11.85	11.87	12.00	12.10	12.31	12.39
20'	11.31	11.42	11.57	11.64	11.83	11.86	11.91	12.04	12.26	12.35
25'	11.24	11.38	11.53	11.61	11.81	11.85	11.82	11.99	12.20	12.32
30'	11.17	11.33	11.48	11.58	11.79	11.83	11.73	11.93	12.14	12.28
40'	11.03	11.24	11.39	11.52	11.75	11.81	11.56	11.82	12.03	12.21
45'	10.95	11.20	11.34	11.49	11.73	11.79	11.47	11.76	11.97	12.17
65'	10.67	11.02	11.16	11.38	11.65	11.74	11.11	11.54	11.74	12.03
75'	10.52	10.92	11.05	11.31	11.58	11.69	10.93	11.43	11.63	11.95
100'	10.17	10.70	10.84	11.18	11.51	11.65	10.49	11.15	11.34	11.77

The shaded areas represent the suggested operating range of 11.0 to 12.0 volts at the first lamp on the trac. Juno suggests that the voltage measured at the first lamp be between 11.0 and 11.8 volts for 12V incandescent lamps and between 11.4 and 12.0 volts for 12V LED fixtures. Do not exceed 12 volts. A voltmeter should be used to confirm that the proper voltage is present.

TRAC 12 12V VOLTAGE DROP INFORMATION (for 150VA Remote Mount Magnetic Transformers)

Table predicting voltage at first lamp for various wire lengths, gauges, inputs and loads

Distance from Transformer to 1st Lamp	Standard Tap				Boost Tap			
	12V, 12.5A, 150W		12V, 6.25A, 75W		12V, 12.5A, 150W		12V, 6.25A, 75W	
	#12	#10	#12	#10	#12	#10	#12	#10
5'	11.22	11.29	12.04	12.08	12.02	12.09	12.86	12.92
10'	11.04	11.18	11.94	12.01	11.83	11.97	12.73	12.85
15'	10.86	11.07	11.84	11.95	11.65	11.86	12.61	12.79
20'	10.68	10.96	11.74	11.89	11.46	11.74	12.48	12.72
25'	10.50	10.85	11.64	11.82	11.28	11.63	12.36	12.66
30'	10.32	10.74	11.54	11.76	11.09	11.51	12.23	12.59
40'	9.96	10.52	11.34	11.63	10.72	11.28	11.98	12.46
50'	9.60	10.30	11.14	11.51	10.35	11.05	11.73	12.33
60'	9.24	10.08	10.94	11.38	9.98	10.82	11.48	12.20
80'	8.52	9.64	10.54	11.12	9.24	10.36	10.98	11.94
100'	7.80	9.20	10.14	10.87	8.50	9.90	10.48	11.68
120'	7.08	8.76	9.74	10.62	7.76	9.44	9.98	11.42
140'	6.36	8.32	9.34	10.36	7.02	8.98	9.48	11.16

The shaded areas represent the suggested operating range of 11.0 to 12.0 volts at the first lamp on the trac. Juno suggests that the voltage measured at the first lamp be between 11.0 and 11.8 volts for 12V incandescent lamps and between 11.4 and 12.0 volts for 12V LED fixtures. Do not exceed 12 volts. A voltmeter should be used to confirm that the proper voltage is present.



TRAC 12

Miniature Low Voltage Trac System

12V AC REMOTE MOUNT MAGNETIC TRANSFORMERS**TL575, TL549N, TL550N, TL554N and TF5150****TRAC 12 12V VOLTAGE DROP INFORMATION (for 240VA Remote Mount Magnetic Transformers)**

Table predicting voltage at first lamp for various wire lengths, gauges, inputs and loads

Distance from Transformer to 1st Lamp	Standard Tap				Boost Tap			
	12V, 20A, 240W		12V, 10A, 120W		12V, 20A, 240W		12V, 10A, 120W	
	#12	#10	#12	#10	#12	#10	#12	#10
5'	11.66	11.79	12.19	12.27	12.46	12.59	13.09	13.17
10'	11.33	11.58	11.98	12.14	12.13	12.38	12.88	13.04
15'	11.00	11.37	11.77	12.01	11.80	12.17	12.67	12.91
20'	10.67	11.16	11.57	11.88	11.47	11.96	12.47	12.78
25'	10.34	10.96	11.36	11.75	11.14	11.76	12.26	12.65
30'	10.00	10.75	11.15	11.62	10.80	11.55	12.05	12.52
40'	9.34	10.33	10.74	11.36	10.14	11.13	11.64	12.26
45'	9.01	10.12	10.53	11.23	9.81	10.92	11.43	12.13
65'	7.68	9.29	9.70	10.71	8.48	10.96	10.60	11.61
75'	7.02	8.88	9.28	10.45	7.82	9.68	10.18	11.35
110'	4.69	7.42	7.83	9.54	5.49	8.22	8.73	10.44

The shaded areas represent the suggested operating range of 11.0 to 12.0 volts at the first lamp on the trac. Juno suggests that the voltage measured at the first lamp be between 11.0 and 11.8 volts for 12V incandescent lamps and between 11.4 and 12.0 volts for 12V LED fixtures. Do not exceed 12 volts. A voltmeter should be used to confirm that the proper voltage is present.

