



TL-D LIFEMAX Super 80

TL-D 30W/865 1SL/25


The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

General Information		Mechanical and Housing	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Bulb Shape	T8 [26 mm (T8)]
Nominal lifetime	15,000 hour(s)	Approval and Application	
Light Technical		Mercury (Hg) Content (Nom)	2.0 mg
Color Code	865 [CCT of 6500K]	Product Data	
Color Designation	Cool Daylight	Full product code	871150028592800
Correlated Color Temperature (Nom)	6500 K	Order product name	TL-D 30W/865 1SL/25
Luminous Efficacy (rated) (Nom)	77 lm/W	Order code	927981286536
Color rendering index (CRI)	80	Numerator - Quantity Per Pack	1
Operating and Electrical		Numerator - Packs per outer box	25
Power Consumption	30 W	Material number (12NC)	927981286536
Lamp Current (Nom)	0.360 A	Full product name	TL-D 30W/865 1SL/25
Voltage (Nom)	98 V	EAN/UPC - Case	8711500285935
Voltage (Nom)	98 V		
Controls and Dimming			
Dimmable	Yes		


TL-D LIFEMAX Super 80

Dimensional drawing

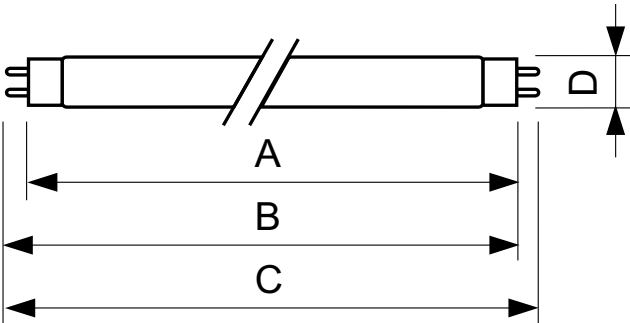


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 30W/865 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

Photometric data

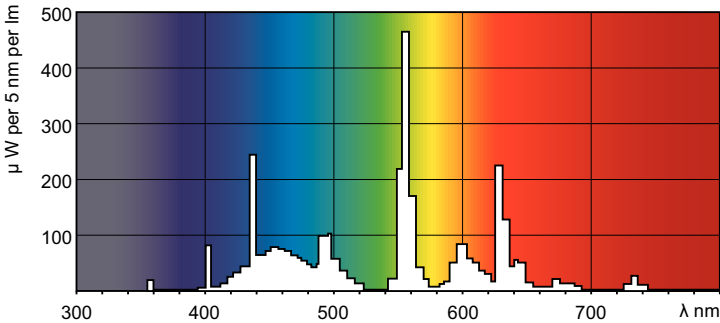


Spectral Power Distribution Colour - TL-D 30W/865 1SL/25

Lifetime

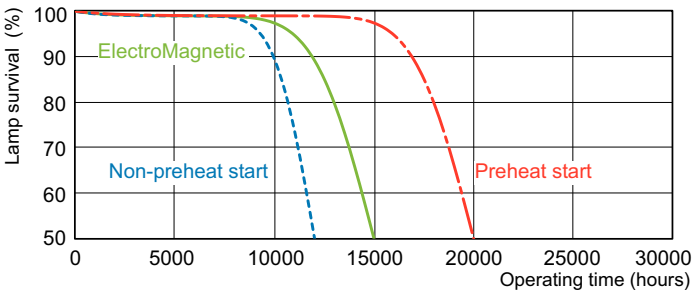


Life Expectancy Diagram - TL-D 30W/865 1SL/25

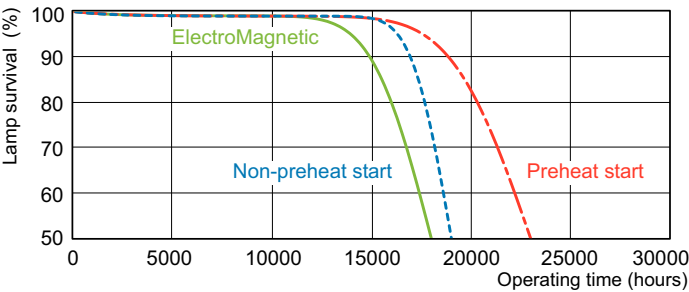

Life Expectancy Diagram - TL-D 30W/865 1SL/25

TL-D LIFEMAX Super 80

Lifetime

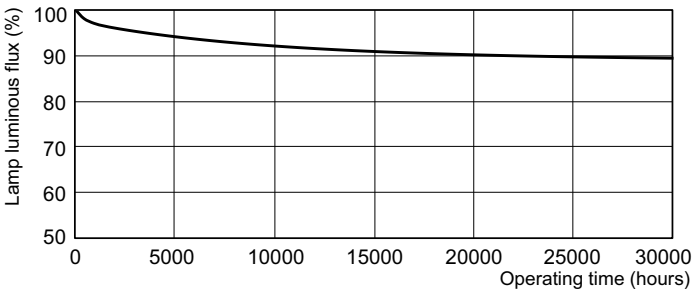

Lumen Maintenance Diagram - TL-D 30W/865 1SL/25

