

Day-Brite CFI

by @signify

Recessed

FluxPanel LED 2x4

Up to 6000 lumens



Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

Day-Brite/CFI FluxPanel LED recessed is a highly versatile luminaire designed to provide smooth lighting gradient on the lens surface and ease of installation. Available for use in recessed, suspended, and surface mount orientation, FluxPanel is ideal for general lighting applications such as open office, schools, healthcare, and retail.

Ordering guide – Standard configurations available with all choices, unless otherwise noted. Base configurations selections indicated by blue.

Example: 2FXP43L840-4-DS-UNV-DIM-EMLED7

Width	Family	Lumens	Color	Length	Diffuser	Voltage	Driver	Options ²
2	FXP		–	4	DS	–	–	
2' 2'	FXP FluxPanel	Standard configurations⁵ 38L 3800 nominal delivered lumens 43L 4300 nominal delivered lumens 48L 4800 nominal delivered lumens 54L 5400 nominal delivered lumens 60L 6000 nominal delivered lumens Base configuration⁶ 42B 4200 nominal delivered lumens	835 80 CRI, 3500K 840 80 CRI, 4000K 850⁹ 80 CRI, 5000K	4' 4'	DS Diffuse (smooth)	UNV Universal Voltage, 120–277 volt 120³ 120V 277³ 277V 347 347V	DIM^{1,8} 0–10V dimming SDIM⁴ Step dimming to 40% input power XDIM^{3,4} MarkX phase dimming	F1 3/8" flex, 3 wire 18 gauge 6' F2 3/8" flex, 4 wire 18 gauge 6' F1/D 3/8" twin flex, 3 wire 18 gauge 6' for dimmable luminaires F2/5W 3/8" single flex, 5 wire 18 gauge 6' for dimmable luminaires F2/6W 3/8" single flex, 6 wire 18 gauge 6' for dimmable and emergency luminaires GLR Fusing, fast blow EMLED Bodine BSL310 10W battery pack EMLED7 Bodine BSL17 7W battery pack CHIC Chicago Plenum rated IAP⁷ Integral Interact Pro RF sensor, enables network lighting control

Accessories (order separately)

- **FMA24** – 2'x4' "F" mounting frame for NEMA "F" mounting
- **FSK24** – 2'x4' surface mount field installation kit (factory welded seams)
- **FSF24** – 2'x4' surface mount field assembly kit (field assembled)
- **4PCH48-1-SC** – adjustable cable hanger kit for 2x4 with straight white 18/3 cord (two-1 powered, 1 non-powered)
- **4PCH48-1D-SC** – adjustable cable hanger kit for 2x4 with straight white 18/5 cord for dimming (two-1 powered, 1 non-powered)

Footnotes

- 1 0–10V dimming to 1% for Standard, and 10% for Base configurations
- 2 All options available with Standard configurations only
- 3 XDIM requires 120V or 277V specification
- 4 Available with 54L package or lower
- 5 Standard configurations are packaged one unit per carton
- 6 Base configurations are packaged two units per carton, and sold in even quantities only
- 7 Specify DIM driver option only
- 8 Integral IAP option dimmable to 5% via wireless wall switch. See page 2.
- 9 Available only with 42B lumen option

Energy data

Luminaire	Catalog Number	Input Power	Efficacy
2x4 Standard	2FXP38L840	33	109
	2FXP43L840	39	107
	2FXP48L840	47	105
	2FXP54L840	51	104
	2FXP60L840	58	101
2x4 Base	2FXP42B840	38	112



interact
ready.

2FXP FluxPanel LED recessed 2x4

Up to 6000 lumens

Application

- 7/16" ultra shallow light guide profile.
- Overall 1-15/16" deep luminaire, including driver box, provides minimal intrusion into the plenum space.
- Even distribution of light on the lens provides exceptionally low glare gradient minimizing distractions at the ceiling plane.
- General light distribution creates uniform horizontal and vertical illuminance on the work plane and limits scalloping on the walls.
- Excellent consistency of correlated color temperature (CCT) per ANSI C78.377.
- CRI 80 minimum color rendering with balanced spectrum.
- Designed for use with standard Grid (NEMA "G") or Narrow Grid (NEMA "NFG") ceiling T-bars. Drywall or plaster application require use with the FMA24 "F" mounting frame accessory (sold and shipped separately).
- Accessory field install kits available for surface (FSK24) and suspended (4PCH48) mounting.

Construction/Finish

- Extruded aluminum frame post painted with gloss white enamel finish. Corners are precision welded for seamless aesthetic.
- Emergency options available with factory installed battery pack and remote field installed test switch/light with cover plate.
- Die formed driver box with standard access plate for ease of wiring, provides tool-free access to driver(s) from above.
- Edge lit LED arrays provide highly efficient and unipixilated transfer of light to the light guide panel.
- Integral clips accommodate definitive attachment to T-bar grid for recessed applications.
- Die formed surface box accessory kit post painted gloss white enamel.

- Suspended accessory kits available, include cables, luminaire mounting clips, and adjustable connectors.
- All Base configurations are shipped two luminaires per master carton. Standard configurations are one luminaire per master carton.

Enclosure

- Acrylic diffuser provides visual comfort and high efficiency.
- Flat opal lens is easy to clean and provides a uniform aesthetic on the ceiling plane.
- Tight enclosure assembly impedes ingress of dust and insects.

Electrical

- Up to 111 lm/W efficacy.
- High efficiency Advance driver featuring high power factor (>0.90), 120-277V 60/50Hz, and less than 15% THD.
- Minimum start temperature -20°C (-4°F).
- Standard configurations are 0-10V dimming to 1%. Base configurations are to 5%.
- To predict lumen output in emergency mode, multiply emergency pack wattage by luminaire efficacy, then by 1.10. Typical lumen output is 1200lm for EMLD, and 850lm for EMLED7.
- Electromagnetic interference (EMI) compliant to FCC Title 47 Part 15 class A.
- Flicker and stroboscopic effect compliant to NEMA 77-2017.
- TM-21 predicted L70 lumen maintenance up to 84,000 hours per LED manufacturer LM-80 report.
- cULus (Base) or cETLus (Standard) listed to UL and CSA standards, suitable for damp locations.
- Base configurations are non-IC rated. Standard configurations are IC rated.
- FluxPanel luminaires are Designlights Consortium® qualified. Please see the DLC QPL list for exact catalog numbers (www.designlights.org/QPL).


General Notes

- All options factory installed.
- All accessories are field installed.
- Many luminaire components, such as reflectors, refractors, lenses, sockets, lampholders, and LEDs are made from various types of plastics which can be adversely affected by airborne contaminants. If sulfur based chemicals, petroleum based products, cleaning solutions, or other contaminants are expected in the intended area of use, consult factory for compatibility.
- Five year limited luminaire warranty includes LED boards and driver. Visit www.signify.com/warranties for complete warranty information.

Interact Pro (IAP)

- Interact Pro brings the power of connected lighting to small and medium businesses without the complexity usually associated with connected lighting.
- Interact Pro includes an app, a portal and a broad portfolio of wireless Luminaires, lamps and retrofit kits all working on the same system.
- Commissioning via Interact Pro App (Android or iPhone)
- Prepare commissioning remotely via Interact Pro portal
- Requires compatible Interact Pro Gateway and internet connectivity for commissioning
- Compatible with UID8451/10 ZigBee Greenpower wireless dimmer switch
- Compatible with wireless Occ sensor (OCC SENSOR IA CM IP42 WH 10/1) or wireless Day/Occ sensor (OCC MULTI SENSOR IA CM WH 10/1)
- Interact Pro sensor attaches to adjacent t-bar, signal propagation from above ceiling
- For more information on Interact Pro visit: www.interact-lighting.com/pro
- For more information on Interact Ready visit: www.philips.com/interact-ready


Dimensions



Note: Base configurations are 1-15/16" deep. Standard configurations are 2-1/8" deep.

Emergency driver box shown is 20.5" (521mm) long.

Standard non-EM driver box is 10.5" (267mm) long

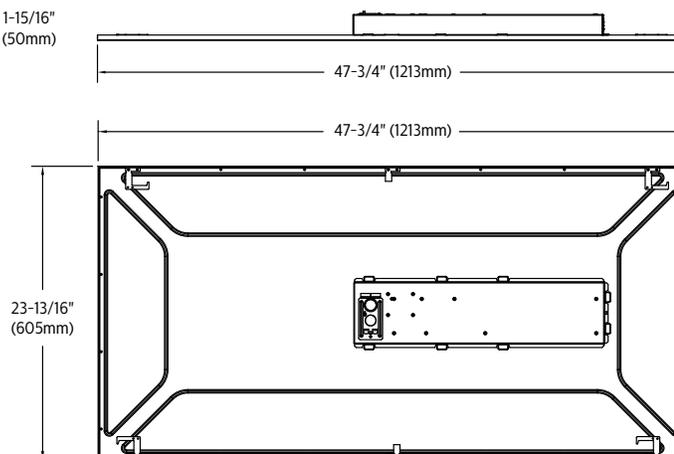

2FXP FluxPanel LED recessed 2x4

Up to 6000 lumens

Photometry

2x4 FluxPanel LED, 4200 nominal delivered lumens 3500K

LER – 108

Catalog No. 2FXP42B835-4-DS-UNV-DIM Test No. 38280 S/MH 1.3 Lamp Type LED Lumens/Lamp 4116 Input Watts 38 Comparative yearly lighting energy cost per 1000 lumens – \$2.22 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.	Candlepower				Light Distribution			Average Luminance																																																																																
	<table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>0</td><td>1444</td><td>1444</td><td>1444</td></tr> <tr><td>5</td><td>1430</td><td>1439</td><td>1447</td></tr> <tr><td>15</td><td>1379</td><td>1389</td><td>1395</td></tr> <tr><td>25</td><td>1284</td><td>1288</td><td>1292</td></tr> <tr><td>35</td><td>1144</td><td>1148</td><td>1146</td></tr> <tr><td>45</td><td>967</td><td>968</td><td>966</td></tr> <tr><td>55</td><td>758</td><td>756</td><td>755</td></tr> <tr><td>65</td><td>521</td><td>521</td><td>505</td></tr> <tr><td>75</td><td>256</td><td>258</td><td>259</td></tr> <tr><td>85</td><td>59</td><td>66</td><td>72</td></tr> </tbody> </table>	Angle	End	45	Cross	0	1444	1444	1444	5	1430	1439	1447	15	1379	1389	1395	25	1284	1288	1292	35	1144	1148	1146	45	967	968	966	55	758	756	755	65	521	521	505	75	256	258	259	85	59	66	72	<table border="1"> <thead> <tr> <th>Degrees</th> <th>Lumens</th> <th>% Luminaire</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>1122</td><td>27.2</td></tr> <tr><td>0-40</td><td>1839</td><td>44.7</td></tr> <tr><td>0-60</td><td>3260</td><td>79.2</td></tr> <tr><td>0-90</td><td>4115</td><td>100.0</td></tr> <tr><td>0-180</td><td>4116</td><td>100.0</td></tr> </tbody> </table>	Degrees	Lumens	% Luminaire	0-30	1122	27.2	0-40	1839	44.7	0-60	3260	79.2	0-90	4115	100.0	0-180	4116	100.0	<table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45°</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>45</td><td>2135</td><td>2137</td><td>2132</td></tr> <tr><td>55</td><td>2062</td><td>2058</td><td>2054</td></tr> <tr><td>65</td><td>1925</td><td>1923</td><td>1864</td></tr> <tr><td>75</td><td>1544</td><td>1555</td><td>1563</td></tr> <tr><td>85</td><td>1048</td><td>1187</td><td>1288</td></tr> </tbody> </table>	Angle	End	45°	Cross	45	2135	2137	2132	55	2062	2058	2054	65	1925	1923	1864	75	1544	1555	1563	85	1048	1187
Angle	End	45	Cross																																																																																					
0	1444	1444	1444																																																																																					
5	1430	1439	1447																																																																																					
15	1379	1389	1395																																																																																					
25	1284	1288	1292																																																																																					
35	1144	1148	1146																																																																																					
45	967	968	966																																																																																					
55	758	756	755																																																																																					
65	521	521	505																																																																																					
75	256	258	259																																																																																					
85	59	66	72																																																																																					
Degrees	Lumens	% Luminaire																																																																																						
0-30	1122	27.2																																																																																						
0-40	1839	44.7																																																																																						
0-60	3260	79.2																																																																																						
0-90	4115	100.0																																																																																						
0-180	4116	100.0																																																																																						
Angle	End	45°	Cross																																																																																					
45	2135	2137	2132																																																																																					
55	2062	2058	2054																																																																																					
65	1925	1923	1864																																																																																					
75	1544	1555	1563																																																																																					
85	1048	1187	1288																																																																																					
Coefficients of Utilization																																																																																								
EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)																																																																																								
pcc	80			70			50																																																																																	
pw	70	50	30	70	50	30	50	30																																																																																
RCR																																																																																								
0	118	118	118	115	115	115	111	111																																																																																
1	109	104	100	106	102	97	96	93																																																																																
2	98	91	83	95	89	81	84	80																																																																																
3	90	79	70	88	78	69	75	68																																																																																
4	81	69	61	80	68	60	67	58																																																																																
5	76	63	54	73	61	53	59	52																																																																																
6	69	56	47	68	56	46	54	46																																																																																
7	65	51	41	63	50	41	48	40																																																																																
8	59	46	38	58	46	38	45	36																																																																																
9	56	42	34	55	41	34	40	34																																																																																
10	53	40	32	52	39	30	38	30																																																																																

2x4 FluxPanel LED, 4200 nominal delivered lumens 4000K

LER – 112

Catalog No. 2FXP42B840-4-DS-UNV-DIM Test No. 38281 S/MH 1.3 Lamp Type LED Lumens/Lamp 4245 Input Watts 38 Comparative yearly lighting energy cost per 1000 lumens – \$2.14 based on 3000 hrs. and \$.08 pwr KWH. The photometric results were obtained in the Day-Brite laboratory which is NVLAP accredited by the National Institute of Standards and Technology. Photometric values based on test performed in compliance with LM-79.	Candlepower				Light Distribution			Average Luminance																																																																																
	<table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>0</td><td>1482</td><td>1482</td><td>1482</td></tr> <tr><td>5</td><td>1467</td><td>1476</td><td>1484</td></tr> <tr><td>15</td><td>1420</td><td>1427</td><td>1434</td></tr> <tr><td>25</td><td>1321</td><td>1329</td><td>1332</td></tr> <tr><td>35</td><td>1179</td><td>1183</td><td>1184</td></tr> <tr><td>45</td><td>998</td><td>1000</td><td>999</td></tr> <tr><td>55</td><td>782</td><td>781</td><td>779</td></tr> <tr><td>65</td><td>537</td><td>537</td><td>522</td></tr> <tr><td>75</td><td>264</td><td>266</td><td>268</td></tr> <tr><td>85</td><td>60</td><td>68</td><td>74</td></tr> </tbody> </table>	Angle	End	45	Cross	0	1482	1482	1482	5	1467	1476	1484	15	1420	1427	1434	25	1321	1329	1332	35	1179	1183	1184	45	998	1000	999	55	782	781	779	65	537	537	522	75	264	266	268	85	60	68	74	<table border="1"> <thead> <tr> <th>Degrees</th> <th>Lumens</th> <th>% Luminaire</th> </tr> </thead> <tbody> <tr><td>0-30</td><td>1154</td><td>27.2</td></tr> <tr><td>0-40</td><td>1894</td><td>44.6</td></tr> <tr><td>0-60</td><td>3361</td><td>79.2</td></tr> <tr><td>0-90</td><td>4243</td><td>100.0</td></tr> <tr><td>0-180</td><td>4245</td><td>100.0</td></tr> </tbody> </table>	Degrees	Lumens	% Luminaire	0-30	1154	27.2	0-40	1894	44.6	0-60	3361	79.2	0-90	4243	100.0	0-180	4245	100.0	<table border="1"> <thead> <tr> <th>Angle</th> <th>End</th> <th>45°</th> <th>Cross</th> </tr> </thead> <tbody> <tr><td>45</td><td>2178</td><td>2183</td><td>2181</td></tr> <tr><td>55</td><td>2105</td><td>2103</td><td>2096</td></tr> <tr><td>65</td><td>1961</td><td>1961</td><td>1908</td></tr> <tr><td>75</td><td>1572</td><td>1586</td><td>1596</td></tr> <tr><td>85</td><td>1070</td><td>1208</td><td>1309</td></tr> </tbody> </table>	Angle	End	45°	Cross	45	2178	2183	2181	55	2105	2103	2096	65	1961	1961	1908	75	1572	1586	1596	85	1070	1208
Angle	End	45	Cross																																																																																					
0	1482	1482	1482																																																																																					
5	1467	1476	1484																																																																																					
15	1420	1427	1434																																																																																					
25	1321	1329	1332																																																																																					
35	1179	1183	1184																																																																																					
45	998	1000	999																																																																																					
55	782	781	779																																																																																					
65	537	537	522																																																																																					
75	264	266	268																																																																																					
85	60	68	74																																																																																					
Degrees	Lumens	% Luminaire																																																																																						
0-30	1154	27.2																																																																																						
0-40	1894	44.6																																																																																						
0-60	3361	79.2																																																																																						
0-90	4243	100.0																																																																																						
0-180	4245	100.0																																																																																						
Angle	End	45°	Cross																																																																																					
45	2178	2183	2181																																																																																					
55	2105	2103	2096																																																																																					
65	1961	1961	1908																																																																																					
75	1572	1586	1596																																																																																					
85	1070	1208	1309																																																																																					
Coefficients of Utilization																																																																																								
EFFECTIVE FLOOR CAVITY REFLECTANCE 20 PER (pfc=0.20)																																																																																								
pcc	80			70			50																																																																																	
pw	70	50	30	70	50	30	50	30																																																																																
RCR																																																																																								
0	118	118	118	115	115	115	111	111																																																																																
1	109	104	100	106	102	97	96	93																																																																																
2	98	91	83	95	89	81	84	80																																																																																
3	90	79	70	88	78	69	75	68																																																																																
4	81	69	61	80	68	60	66	58																																																																																
5	76	63	54	73	61	53	59	52																																																																																
6	69	56	47	68	56	46	54	46																																																																																
7	65	51	41	63	50	41	48	40																																																																																
8	59	46	38	58	46	38	45	36																																																																																
9	56	42	34	55	41	34	40	34																																																																																
10	53	40	32	51	39	30	38	30																																																																																

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

