


LED Centre Basket



RGD-CB3	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (20W-56W)	2,500-7,000lm

Features

- Slim design (2.24" depth) White Powder Coated CRCA housing for better Thermal Management.
- Damp Location rated with operating temperature range of -20 °C ~ + 50 °C.
- Field Selectable CCT (3500K, 4000K & 5000K) along with 120-347V LED Auto-Sensing driver.
- Available in (1'x4', 2'x2', 2'x4') sizes with Field Selectable Multi-wattage variant.

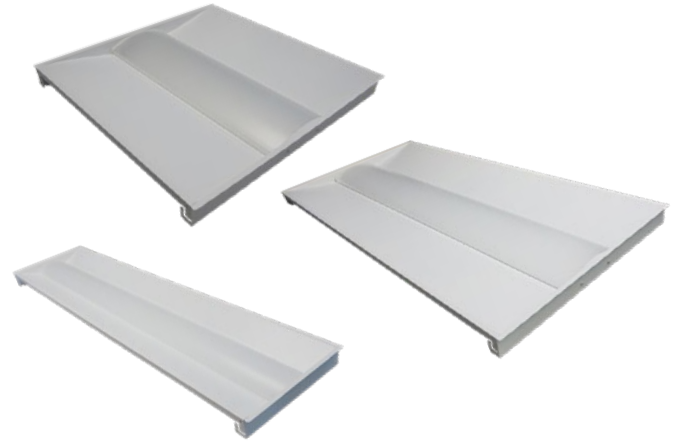

Specifications

Housing:

White Powder Coated CRCA housing for better Thermal Management.

Optics:

Premium Grade frosted PMMA with low glare.

Mounting:

Grid Ceiling, Surface and Suspension installation with help of optional kits.

Driver:

120-347V LED Auto-Sensing driver with Operating temperature range of -20 °C ~ +50 °C.

LED:


Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of $\geq 125\text{lm/w}$.

Controls:

0-10V Dimming & Optional Motion Sensor




Dimensional Drawing

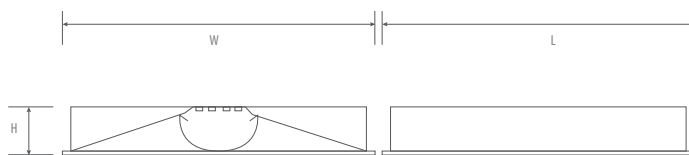

	L	W	H
1'x4'	11.75"	47.75"	2.24"
2'x2'	23.75"	23.75"	2.24"
2'x4'	23.75"	47.75"	2.24"

Polar Candela

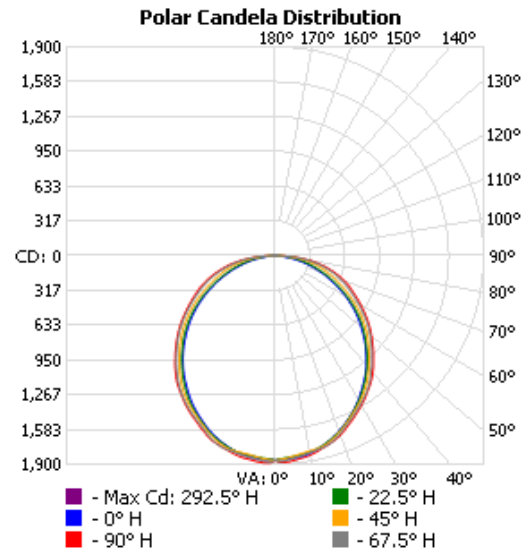

Applications



Offices



Hospitals



Malls



Showrooms

LED Centre Basket



RGD-CB3	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	Selectable Wattage (20W-56W)	2,500-7,000lm

Ordering Information Example: RGD-CB3/14/MW/MK/120-347V/D/LVS

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Dimmable	Options
RGD (Rigid)	CB3 (LED centre basket)	22 (2'x2') 14 (1'x4') 24 (2'x4')	MW (Selectable Wattage)	MK (Selectable Kelvin/CCT)	120-347V	D (0-10V dimming)	LVS (Low voltage sensor, factory installed)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Dimension (inch)	Case QTY.
3680335	Yes	RGD-CB3/14/MW/MK/120-347V/D	30-25-20	120-347V	50,000	3750-3125-2500	35-40-50	>80	11.75x47.75x2.24	2
3682227	Yes	RGD-CB3/14/MW/MK/120-347V/D/LVS	30-25-20	120-347V	50,000	3750-3125-2500	35-40-50	>80	11.75x47.75x2.24	2
3680336	Yes	RGD-CB3/S/22/MW/MK/120-347V/D	30-25-20	120-347V	50,000	3750-3125-2500	35-40-50	>80	23.75x47.75x2.24	2
3680337	Yes	RGD-CB3/22/MW/MK/120-347V/D	35-30-25	120-347V	50,000	4375-3750-3125	35-40-50	>80	23.75x47.75x2.24	2
3682228	Yes	RGD-CB3/22/MW/MK/120-347V/D/LVS	35-30-25	120-347V	50,000	4375-3750-3125	35-40-50	>80	23.75x47.75x2.24	2
3680338	Yes	RGD-CB3/M/24/MW/MK/120-347V/D	45-38-34	120-347V	50,000	5625-4750-4250	35-40-50	>80	23.75x47.75x2.24	2
3680339	Yes	RGD-CB3/XL/24/MW/MK/120-347V/D	56-52-46	120-347V	50,000	7000-6500-5750	35-40-50	>80	23.75x47.75x2.24	2
3682229	Yes	RGD-CB3/M/24/MW/MK/120-347V/D/LVS	45-38-34	120-347V	50,000	5625-4750-4250	35-40-50	>80	23.75x47.75x2.24	2
3660282	-	RGD-CB3/LVS/CONTROLLER	RGD-CB3 LV Sensor Controller for CB3/LVS							

Related Products



SSL-CHB



SSL-CHY



DL-EC



Running Man sign