

# LED Recessed Swivel Downlight



<b>RGD-JH</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	9W	650lm

## Features

- Slim Profile Aluminum body COB downlighter in brushed nickel, black and white finish.
- Wet Location rated with operating temperature range of -20 °C ~ +55 °C. IC rated
- Field Selectable CCT (2700K, 3000K, 3500K, 4000K & 5000K) with 40° Beam angle & 90° Tilt Angle
- Eyeball design with 360° rotation and Excellent CRI of ≥92.

## Specifications

### Housing:

Pressure Die Cast Aluminum.

### Optics:

Premium Grade PC Lens with 40° Beam angle.

### Mounting:

Recessed Mounting with Spring Clamps.

### Driver:

120V LED driver with Operating temperature range of -20 °C ~ +55 °C



### LED:

Field Selectable CCT of 2700K, 3000K, 3500K, 4000K & 5000K. Efficacy of ≥ 72lm/w.


### Controls:

TRIAC Dimming

## Dimensional Drawing

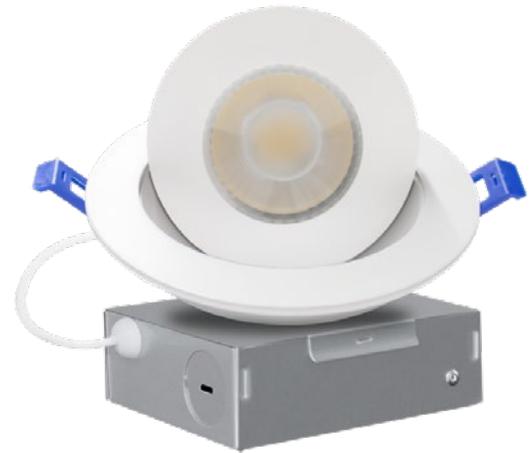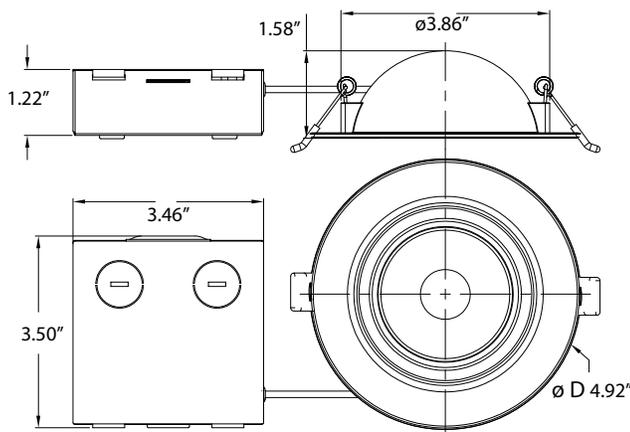

## Polar Candela

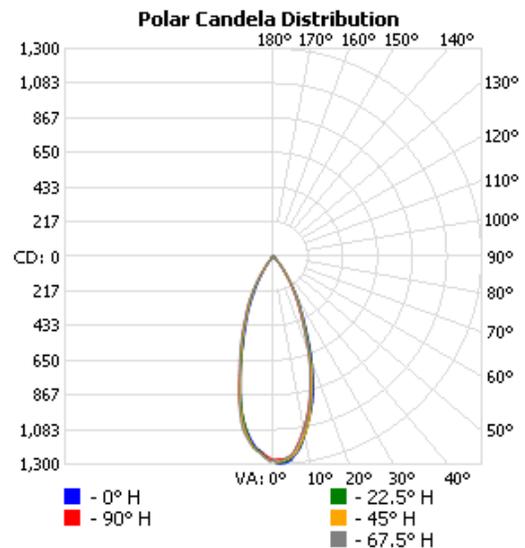

## Applications



# LED Recessed Swivel Downlight



<b>RGD-JH</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Residential	9W	650lm

## Ordering Information Example: RGD-JH/9W/5CCT/120V/WH/D

Family Name	Fixture Type	Wattage	CCT	Voltage	Finish Color	Dimmable
RGD (Rigid)	JH (LED recessed swivel downlight)	9W	5CCT (5CCT adjustable)	120V	WH (White) BN (Brush nickel) BLK (Black)	D (TRIAC dimmable)

## Product Information

Ordering Code	Energy Star	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Dimension D (inch)*	Case QTY.
3682103	Yes	RGD-JH/9W/5CCT/120V/WH/D	9	120	50,000	650	27/30/35/40/50	≥92	Yes	4.92"	24
3682104	Yes	RGD-JH/9W/5CCT/120V/BLK/D	9	120	50,000	650	27/30/35/40/50	≥92	Yes	4.92"	24
3682105	Yes	RGD-JH/9W/5CCT/120V/BN/D	9	120	50,000	650	27/30/35/40/50	≥92	Yes	4.92"	24

\* Hole cut-out size Ø4 1/8"

## Related Products



RGD-CDR



RGD-CHY2



PRO-SP5



RGD-HS