

Individual Spec Sheet

CIRKA

ROUND LED CEILING LUMINAIRE

3 CCT Selectable
Slim & Lightweight

ORDERING INFORMATION

Order code: 68715
Model number: CRK9-R18W-A-3CWH
UPC: 069549018662
Case quantity: 20

PHYSICAL DATA

Dimensions in (mm): 9" (225)
Lens finish: Frosted
Housing material: PC
Housing finish: White
Mounting: Surface

PERFORMANCE DATA

Watts (W): 18
Volts (V AC): 120
Color temperature (K)¹: 3 000/4 000/5 000
Lumen output (lm)²: 1 260
Efficacy (lm/W): 70
CRI: 80
Life L70 (h)³: 50 000
Dimming : Yes
Power factor: 0.9
THD (%): < 40
Frequency (Hz): 60
Operating temp. range: -10° C to 45° C (14 °F to 113 °F)

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from Energy Star reported data. Please refer to Lumen Specification Table for more details on other color temperatures.

³ Life hours are derived from IESNA LM80-08 testing report and projected per IESNA TM-21-11 extrapolations.

LUMEN SPECIFICATION TABLE


| Model number | 3 000 K | | 4 000 K | | 5 000 K | |
|------------------|-------------|-----------------|-------------|-----------------|-------------|-----------------|
| | Lumens (lm) | Efficacy (lm/W) | Lumens (lm) | Efficacy (lm/W) | Lumens (lm) | Efficacy (lm/W) |
| CRK9-R18W-A-3CWH | 1 227 | 68 | 1 363 | 76 | 1 227 | 68 |

Default programming: 3 000 K

COMPATIBLE ACCESSORIES

| Order code | Type | Case qty (master) |
|---------------|---------------------------|-------------------|
| RNG-TRM09-BN | 9" Brushed Nickel trim | 20 |
| 68901 | 9" Polished Black trim | 20 |
| 68902 | 9" Polished Chrome trim | 20 |
| RNG-TRM09-BRG | 9" Brushed Rose Gold trim | 20 |
| RNG-TRM09-BB | 9" Brushed Bronze trim | 20 |

SCREWLESS MAGNETIC TRIMS

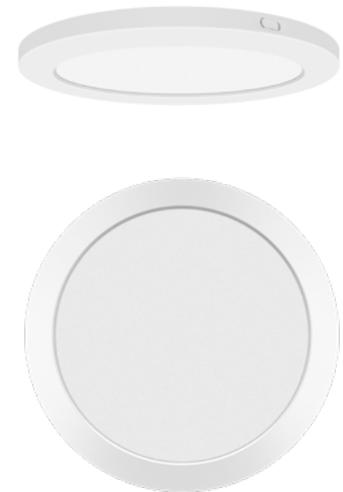

quick ship



LED fixture



dimable



damp location



ICES 005




This lighting equipment complies with Canadian standard ICES-005 for use in residential applications. Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

COMPATIBLE DIMMERS

| Brand | Model |
|---------|--|
| LUTRON | PD-5NE, PD-6WCL, DVCL-153P, CTCL-153P, DVCL-253P, AYCL-253P, DVRP-253-WH, SELV-300P, MACL-153P, RRD-6NA-WH |
| COOPER | AAL06, SLC03P |
| LEVITON | 066EV, IPL06, 6674, DSL06-1ZL, IPE04-1LZ |

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Stanpro recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.


DIMENSIONS

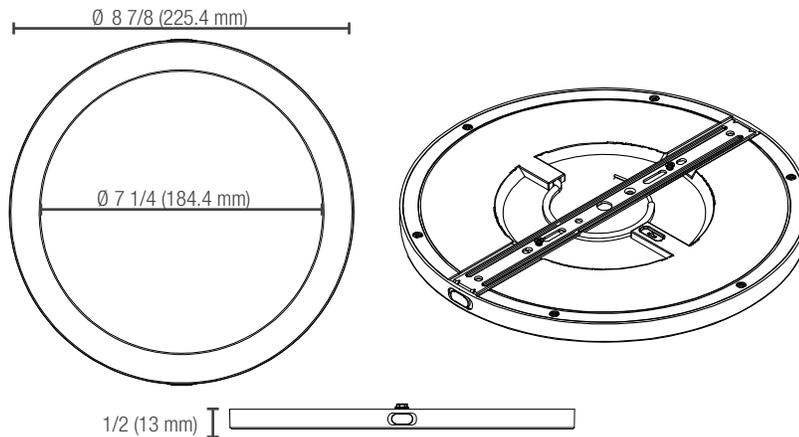

PHOTOMETRIC DATA¹

68715 • CRK9-R18W-A-3CWH • 3 000 K • 1 226 lm

Polar candela distribution

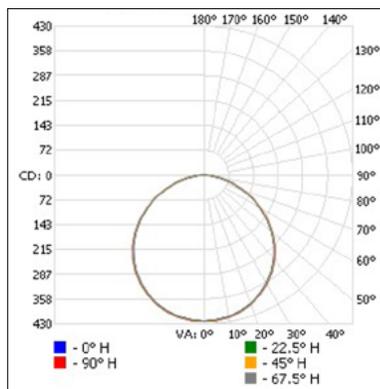

Zonal lumen summary

| Zone | Lumens | % Fixture |
|-------|---------|-----------|
| 0-30 | 330.3 | 27 |
| 0-40 | 543.0 | 44.3 |
| 0-60 | 964.5 | 78.7 |
| 60-90 | 260.9 | 21.3 |
| 0-90 | 1 225.4 | 100 |

Illuminance at a distance

| Center beam fc | | Beam width | |
|----------------|------|------------|-------|
| 1.7' | 146 | 5.2' | 5.3' |
| 3.3' | 38.8 | 10.0' | 10.3' |
| 5.0' | 16.9 | 15.2' | 15.5' |
| 6.7' | 9.40 | 20.4' | 20.7' |
| 8.3' | 6.13 | 25.2' | 25.7' |
| 10.0' | 4.22 | 30.4' | 30.9' |

■ Vert. spread: 113.3°
■ Horiz. spread: 114.2°

¹ Complete IES files available on our website.

| Qty | Description | Price |
|-----|-------------|-------|
| | | |

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.