

Technical Information Bulletin

Design LED Filament Lamps




Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67163
 Description: ST19/S2/7W/30K/V/FIL/STD
 UPC: 69549671638
 Case quantity: 10 / 40

PHYSICAL DATA

Shape: ST19
 Base: E26
 Finish: Clear
 Filament type: Vertical

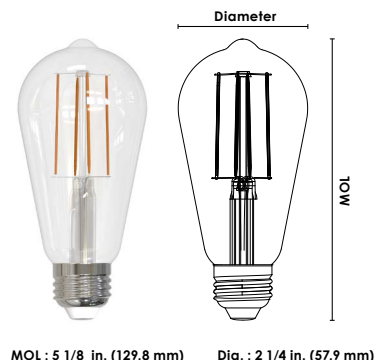

PERFORMANCE DATA

Watts (W): 7
 Volts (VAC): 120
 Colour temp. (K)¹: 3 000
 Lumen output (lm): 800
 Lumen per Watts (lm/W): 114
 Traditional equivalent (W): 60
 CRI: 80
 Life L70 (h): 15 000
 Beam angle (°): 360
 Power factor: 0.9
 Frequency (Hz): 60
 Dimming: Forward and reverse
 Burning position: Universal
 Operating temp. range: -30 °C to 40 °C (-22 °F to 104 °F)

COMPATIBLE DIMMERS

Legrand	RH703PTUTC
Cooper	RRD-6NA
Leviton	6615, 6674, DDMX1, DSM10-1LZ, IPE04-1LZ, IPL06
Lutron	AYCL-253P, CTCL-153P, DVCL-253P, MACL-153P, PD-5NE, SELV-300P

¹ Typical colour temperature range: +/- 5 %



Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

This lighting equipment complies with Canadian standard ICES-005 for use in residential applications.
 Data is based upon tests performed in a controlled environment and representative of relative performance.
 Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

November 7, 2018