

ALTER SOFT LIGHTS QVS2GPFOS232

2' X 4' RECESSED DIRECT/INDIRECT FLUORESCENT 2 LAMP, T8,
5 1/2" DEEP MICROPERFORATED MESH LAMP SHIELD


Features

- Efficiency 56.9%.
- Swing down microperforated lamp shield for easy relamping and maintenance.
- Alter soft white film on inside of mesh conceals lamp image providing balance between reflected and direct light.
- Fully recessed luminaire and lamp compartment.
- 95% Reflective Alter soft white paint finish.
- Specular interior reflector.
- One piece body for easy installation.
- Easy access to ballast through lamp compartment.
- Fits standard T-Grid ceilings.
- Optional acrylic drop-down visual element.




Mounting Methods / Features

Ceiling compatibility

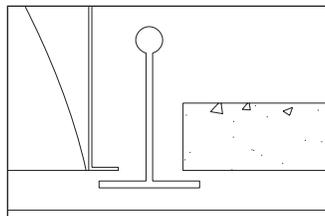


Suited to standard exposed T-grid ceilings

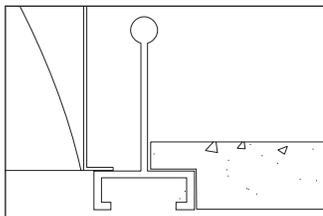


Suited to standard exposed Slot T-grid ceilings

Swing down optical system for easy relamping and maintenance

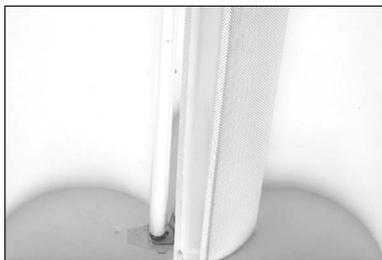



Microperforated mesh lamp shields

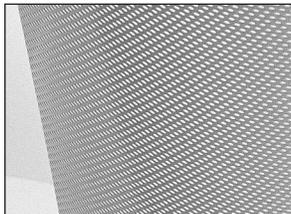

Also available with solid opaque swing-down lamp shield



Dimensions

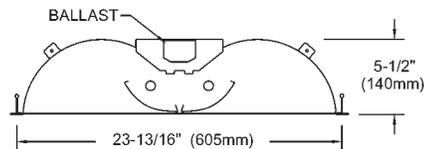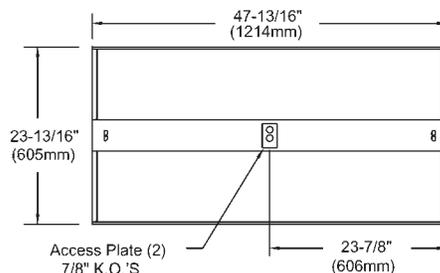

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Volts/Ballast:	



Lightolier a Genlyte Thomas Company www.lightolier.com
 Technical Information: (978) 657-7600 • Fax (978) 658-0595
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division)
 A0902 **Section 5 / Folio L30-10**

LIGHTOLIER®

ALTER SOFT LIGHTS QVS2GPFOS232

2' X 4' RECESSED DIRECT/INDIRECT FLUORESCENT 2 LAMP, T8, 5 1/2" DEEP MICROPERFORATED MESH LAMP SHIELD

Photometry

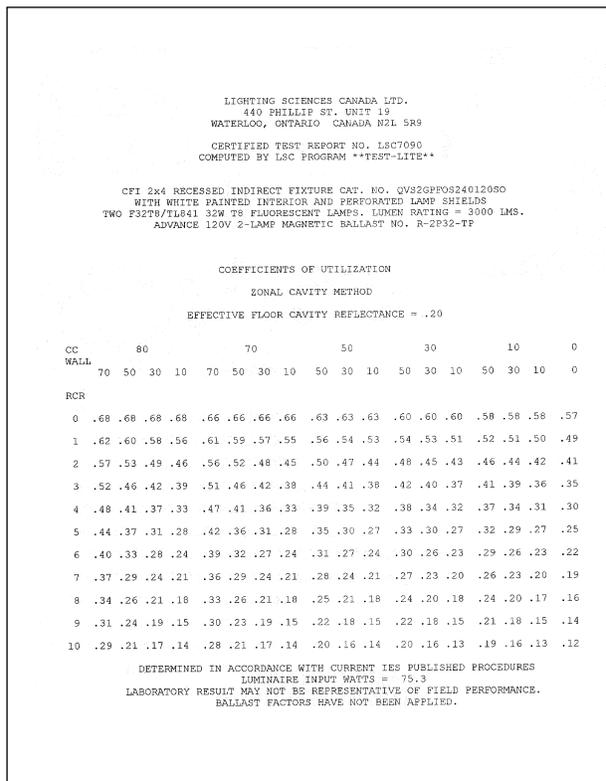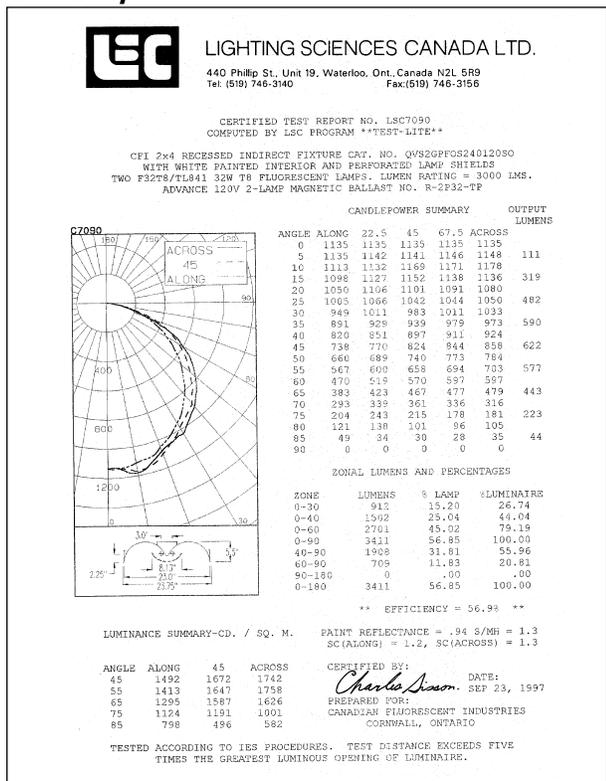

Ordering Information Explanation of Catalog Number Example: QVS2GPFOS232120S0

QVS QUALITY VISUAL STATIC Recessed direct indirect soft light optical system	2 FIXTURE WIDTH: 2'	G CEILING TYPE: Standard exposed T-grid ceilings	LAMP SHIELD: PF = Microperforated SD = Solid	2 LAMP QUANTITY	32 LAMP/FIXTURE LENGTH: (NOMINAL 24") 32 = 32W T8	VOLTAGE: 120V 277V 347V	OPTIONS: R = Radio Interference Filter O = Emergency Lighting System (for Canada) N = Emergency Lighting System (for U.S.)
---	----------------------------------	---	---	---------------------------	---	---	--

CLEAR POLISHED ACRYLIC DROP DOWN VISUAL ELEMENT:
OS = Open slot (no acrylic)
OP = One Piece (no center slot)
GC = Clear acrylic
GG = Clear acrylic / Green projected color face
GB = Clear acrylic / Blue projected color face
GR = Clear acrylic / Red projected color face

SPECIFICATIONS

MATERIALS: One piece chassis constructed from die formed 20 gauge cold rolled steel. Reflectors - 95% reflectance baked white acrylic matte paint finish. Specular interior reflector. Soft white acrylic film on inside of lamp shield conceals lamp image.

FINISH: Chassis exterior - phosphate undercoating, baked white acrylic matte high reflectance paint finish.

ELECTRICAL: Rapid start HPF, thermally protected class "P" ballast. If K.O.s are within 3" of ballast use wire suitable for at least 90C.

LABELS: Listed by

Job Information Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
Technical Information: (978) 657-7600 • Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division)
A0902 **Section 5 / Folio L30-10**

LIGHTOLIER®