



Lumec RoadFocus LED cobra head luminaires feature a sleek design that provides seamless replacement of existing HID luminaires. RoadFocus is available in three sizes, offers multiple lumen packages, and a complete array of optical distributions, making it an outstanding solution for all types of roadway applications. Includes Service Tag, innovative way to provide assistance throughout the life of the product.

Project: _____

Location: _____

Cat.No: _____

Type: _____

Lumens: _____ Qty: _____

Notes: _____

Ordering guide

example: RFM-108W32LED3K-G2-R2M-UNV-DMG-HS-PH8-RCD7-GY3

Series	LED module	CCT	Generation	Distribution	Voltage	Options		Finish
						Controls ⁴	Options	
RFM			G2					
RFM RoadFocus medium	130W32LED	4K 4000K	G2 Generation 2	Type 2	UNV 120-277V HVV 347-480V	D4I ¹⁶ Zhaga-D4i certified	2C Two clamp with 4 bolts	BK Black BR Bronze GY3 Gray WH White
	135W40LED ¹⁴	3K 3000K		R2S Type II short (ASYM)		DALI ¹ Digitally addressable lighting interface	API Factory installed NEMA label, ANSI C136.15-2015 compliant	
	55W48LED ¹²	2.7K ¹¹ 2700K		R2M Type II Medium (ASYM)		DMG ⁵ 0-10V	FAWS ⁷ Field adjustable wattage selector	
	80W48LED	2.2K ¹¹ 2200K		Type 3		SRD ¹ Sensor ready driver, standard configuration	CSS ^{2,15} Cul-de-Sac Shield	
	108W48LED			R3S Type III short (ASYM)		SRD1 ¹ Sensor ready driver, alternate configuration	FSS ^{2,15} Front Side Shield	
	160W48LED			Type 4			HS ^{2,15} House Side Shield	
	50W60LED ¹⁴			R3M Type III Medium (ASYM)			LSS ^{2,15} Left Side Shield	
	75W60LED ¹⁴			Type 5			RSS ^{2,15} Right Side Shield	
	100W60LED ¹⁴			4 Type IV (ASYM)			NRC ⁸ No receptacle	
	120W60LED ¹⁴			5 Type V (SYMM)			NYBC 4-position terminal block	
	150W60LED ¹⁴						OMS ¹⁷ Outdoor Multisensor	
	170W60LED ¹⁴						PH8 ^{1,10} Twist-lock photoelectric cell, UNV (120-277VAC)	
							PH8/347 ^{10,13} Twist-lock photoelectric cell (347VAC)	
							PH8/480 ^{10,13} Twist-lock photoelectric cell (480VAC)	
							PHXL ^{1,10} Twist-lock photoelectric cell, extended life, UNV (120-277VAC)	
							PH9 ¹⁰ Shorting cap	
							RCD ^{3,9} Tool less receptacle for twist-lock photocell or shorting cap, 5-pin (optional)	
							RCD7 ^{3,5} Tool less receptacle for twist-lock photocell or shorting cap, 7-pin (standard)	
							SP2 20kV / 10kA Surge protector	
							TLRSR ⁶ SR receptacle	
							BAC ¹⁸ Meets the requirements of the Buy American Act of 1933 (BAA)	

¹ Not available with HVV.

² Refer to Accessories section to confirm compatibility of shields with optical distribution

³ Use of photoelectric cell or shorting cap is required to ensure proper illumination.

⁴ Select either DALI or DMG or SRD or SRD1 mandatory option.

⁵ Please note this integrated feature come standard with RoadFocus.

⁶ Only available with SRD or SRD1 Driver Options.

⁷ Only available with DMG Driver Options

⁸ Not available with PH8, PH8/347, PH8/480, PHXL, PH9, DALI, SRD or SRD1 Driver Options.

⁹ Not available with SRD Driver Options.

¹⁰ Either RCD or RCD7 must be selected for this option.

¹¹ Extended lead-time may apply. Consult factory.

¹² FAWS table accuracy +/- 15% on these models.

¹³ Not available with UNV.

¹⁴ Only available with R2M or R3M distributions.

¹⁵ 1 shield provided per LED light engine.

¹⁶ TLRSR must be selected with D4I

¹⁷ TLRSR and D4I must be selected with OMS

¹⁸ Failure to properly select the "BAC" suffix could result in you receiving product that is not BAA compliant product with no recourse for an RMA or refund. This BAC designation hereunder does not address (i) the applicability of, or availability of a waiver under, the Trade Agreements Act, or (ii) the "Buy America" domestic content requirements imposed on states, localities, and other non-federal entities as a condition of receiving funds administered by the Department of Transportation or other federal agencies.

¹⁹ Consult Signify to confirm whether specific accessories are BAA-compliant.

RFM RoadFocus

LED Cobra head (medium)

Shielding accessories¹ (must be ordered as separate line item – quickly and easily installed in the field)

Interact City connector node (Contact the factory for additional support when connected lighting or additional services are desired.)

Description	Luminaire Option Code	Accessory Ordering Code		Shield vs Distribution Compatibility					
		12/16 LED version*	20 LED version*	R2M	R2S	R3M	R3S	4	5
Cul-de-sac shield	CSS	ACC-LG66V16LED-CSS	ACC-LG66V20LED-CSS	Yes	Yes	Yes	Yes	Yes	Yes
Front side shield	FSS	ACC-LG66V16LED-FSS	ACC-LG66V20LED-FSS	Yes	Yes	Yes	Yes	No	Yes
House side shield	HS	ACC-LG66V16LED-HS	ACC-LG66V20LED-HS	Yes	Yes	Yes	Yes	Yes	No
Left side shield	LSS	ACC-LG66V16LED-LSS	ACC-LG66V20LED-LSS	Yes	Yes	Yes	Yes	Yes	Yes
Right side shield	RSS	ACC-LG66V16LED-RSS	ACC-LG66V20LED-RSS	Yes	Yes	Yes	Yes	Yes	Yes

*Refer to Wattage table to confirm light engine configuration. Example, if configuration is 2x16LED, 2 of the desired shields must be ordered per luminaire.

Predicted Lumen Depreciation Data

Predicted performance derived from LED manufacturer's data and engineering design estimates, based on IESNA LM-80 methodology. Actual experience may vary due to field application conditions. L70 is the predicted time when LED performance depreciates to 70% of initial lumen output. Calculated per IESNA TM21-11 Addendum B. Published L70 hours limited to 6 times actual LED test hours.

Ambient Temperature °C	L70 per TM-21	Lumen Maintenance % at 60,000 hrs
25°C	>60,000 hours	>97.6%

LED Wattage values

Ordering Code	Total LEDs	Light Engine Configuration	Average System Watts ²	Wattage label ³
RFM-130W32LED	32	2x16LED	129	130
RFM-135W40LED	40	2x12LED+1x16LED	135	140
RFM-55W48LED	48	3x16LED	55	60
RFM-80W48LED	48	3x16LED	81	80
RFM-108W48LED	48	3x16LED	106	110
RFM-160W48LED ¹⁸	48	3x16LED	161	160
RFM-50W60LED	60	3x20LED	52	50
RFM-75W60LED	60	3x20LED	77	80
RFM-100W60LED	60	3x20LED	99	100
RFM-120W60LED	60	3x20LED	122	120
RFM-150W60LED	60	3x20LED	149	150
RFM-170W60LED ¹⁸	60	3x20LED	170	170

1. Typical values, rounded.

2. As per ANSI C136.15-2015. Consult factory for other labelling needs.

3. Rated for +40°C / +104°F.

RFM RoadFocus

LED Cobra head (medium)

4000K LED Lumen values, multiply values by 0.769 for 2.2K

Ordering Code	Color Temp.	Type R2M			Type R2S			Type R3M			Type R3S			Type 4			Type 5		
		Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating
130W32LED	4000	14,913	116	B3-U0-G2	15,633	121	B3-U0-G2	14,971	116	B3-U0-G2	15,172	118	B2-U0-G2	14,901	116	B2-U0-G3	15,500	120	B4-U0-G2
135W40LED	4000	15,066	112	B3-U0-G3	15,794	117	B3-U0-G2	15,125	112	B3-U0-G2	15,328	114	B2-U0-G3	15,054	112	B2-U0-G3	15,659	116	B4-U0-G2
55W48LED	4000	7,747	141	B2-U0-G1	8,123	147	B2-U0-G1	7,778	141	B2-U0-G1	7,883	143	B1-U0-G2	7,742	141	B1-U0-G2	8,053	146	B3-U0-G1
80W48LED	4000	11,109	138	B2-U0-G2	11,647	145	B2-U0-G2	11,153	138	B2-U0-G2	11,302	140	B2-U0-G2	11,101	138	B2-U0-G2	11,546	143	B4-U0-G2
108W48LED	4000	14,024	132	B3-U0-G2	14,702	139	B3-U0-G2	14,079	133	B3-U0-G2	14,268	135	B2-U0-G2	14,013	132	B2-U0-G2	14,576	138	B4-U0-G2
160W48LED	4000	19,412	121	B3-U0-G3	20,351	127	B3-U0-G2	19,489	121	B3-U0-G3	19,750	123	B2-U0-G3	19,397	121	B3-U0-G3	20,176	126	B4-U0-G2
50W60LED	4000	8,038	154	B2-U0-G2	N/A	N/A	N/A	8,081	155	B2-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
75W60LED	4000	10,979	143	B2-U0-G2	N/A	N/A	N/A	11,038	143	B2-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100W60LED	4000	13,615	138	B3-U0-G3	N/A	N/A	N/A	13,688	138	B3-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
120W60LED	4000	16,094	132	B3-U0-G3	N/A	N/A	N/A	16,181	133	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
150W60LED	4000	19,078	128	B3-U0-G3	N/A	N/A	N/A	19,180	129	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
170W60LED	4000	21,037	124	B3-U0-G3	N/A	N/A	N/A	21,150	124	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

3000K LED Lumen values

Ordering Code	Color Temp.	Type R2M			Type R2S			Type R3M			Type R3S			Type 4			Type 5		
		Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating
130W32LED	3000	13,990	109	B3-U0-G2	14,666	114	B3-U0-G2	14,045	109	B3-U0-G2	14,233	111	B2-U0-G2	13,979	109	B2-U0-G3	14,541	113	B4-U0-G2
135W40LED	3000	14,254	106	B3-U0-G3	14,944	111	B3-U0-G2	14,311	106	B3-U0-G2	14,503	107	B2-U0-G2	14,243	106	B2-U0-G3	14,815	110	B4-U0-G2
55W48LED	3000	7,268	132	B2-U0-G1	7,620	138	B2-U0-G1	7,297	132	B2-U0-G1	7,395	134	B1-U0-G2	7,263	132	B1-U0-G2	7,555	137	B3-U0-G1
80W48LED	3000	10,422	129	B2-U0-G2	10,926	136	B2-U0-G2	10,463	130	B2-U0-G2	10,603	132	B2-U0-G2	10,414	129	B2-U0-G2	10,832	134	B4-U0-G2
108W48LED	3000	13,156	124	B3-U0-G2	13,792	130	B3-U0-G2	13,208	125	B3-U0-G2	13,385	126	B2-U0-G2	13,146	124	B2-U0-G2	13,674	129	B4-U0-G2
160W48LED	3000	18,211	113	B3-U0-G3	19,092	119	B3-U0-G2	18,283	114	B3-U0-G3	18,528	115	B2-U0-G3	18,197	113	B3-U0-G3	18,928	118	B4-U0-G2
50W60LED	3000	7,643	146	B2-U0-G2	N/A	N/A	N/A	7,684	147	B2-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
75W60LED	3000	10,439	136	B2-U0-G2	N/A	N/A	N/A	10,495	136	B2-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100W60LED	3000	12,945	131	B3-U0-G2	N/A	N/A	N/A	13,015	131	B3-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
120W60LED	3000	15,302	125	B3-U0-G3	N/A	N/A	N/A	15,384	126	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
150W60LED	3000	18,139	122	B3-U0-G3	N/A	N/A	N/A	18,237	122	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
170W60LED	3000	20,002	118	B3-U0-G3	N/A	N/A	N/A	20,110	118	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

2700K LED Lumen values


Ordering Code	Color Temp.	Type R2M			Type R2S			Type R3M			Type R3S			Type 4			Type 5		
		Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating	Lumen Output	Efficacy (LPW)	BUG Rating
130W32LED	2700	12,829	100	B3-U0-G2	13,449	104	B3-U0-G2	14,045	109	B3-U0-G2	13,052	109	B2-U0-G2	12,819	100	B2-U0-G3	13,334	104	B4-U0-G2
135W40LED	2700	12,800	95	B3-U0-G2	13,419	99	B3-U0-G2	12,851	95	B3-U0-G2	13,023	96	B2-U0-G2	12,790	95	B2-U0-G3	13,304	99	B4-U0-G2
55W48LED	2700	6,665	121	B2-U0-G1	6,988	127	B2-U0-G1	7,297	132	B2-U0-G1	6,781	132	B1-U0-G2	6,660	121	B1-U0-G2	6,928	126	B3-U0-G1
80W48LED	2700	9,557	119	B2-U0-G2	10,019	124	B2-U0-G2	10,560	131	B2-U0-G2	9,723	131	B2-U0-G2	9,550	119	B2-U0-G2	9,933	123	B4-U0-G2
108W48LED	2700	12,064	114	B3-U0-G2	12,648	119	B3-U0-G2	13,208	125	B3-U0-G2	12,274	125	B2-U0-G2	12,055	114	B2-U0-G2	12,539	118	B4-U0-G2
160W48LED	2700	16,700	104	B3-U0-G3	17,508	109	B3-U0-G2	18,283	114	B3-U0-G3	16,991	114	B2-U0-G3	16,687	104	B3-U0-G3	17,357	108	B4-U0-G2
50W60LED	2700	6,983	134	B2-U0-G2	N/A	N/A	N/A	7,021	134	B2-U0-G1	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
75W60LED	2700	9,538	124	B2-U0-G2	N/A	N/A	N/A	9,589	125	B2-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
100W60LED	2700	11,828	119	B2-U0-G2	N/A	N/A	N/A	11,892	120	B2-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
120W60LED	2700	13,982	115	B3-U0-G3	N/A	N/A	N/A	14,057	115	B3-U0-G2	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
150W60LED	2700	16,574	111	B3-U0-G3	N/A	N/A	N/A	16,663	112	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
170W60LED	2700	18,276	108	B3-U0-G3	N/A	N/A	N/A	18,374	108	B3-U0-G3	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Actual performance may vary due to installation variables including optics, mounting/ceiling height, dirt depreciation, light loss factor, etc.; highly recommended to confirm performance with a layout – contact Applications at signify.com/outdoorluminaires. Consult DLC QPL to confirm your specific fixture selection is DLC approved.
Note: Some data may be scaled based on tests of similar but not identical luminaires.

RFM RoadFocus

LED Cobra head (medium)

Dimensions

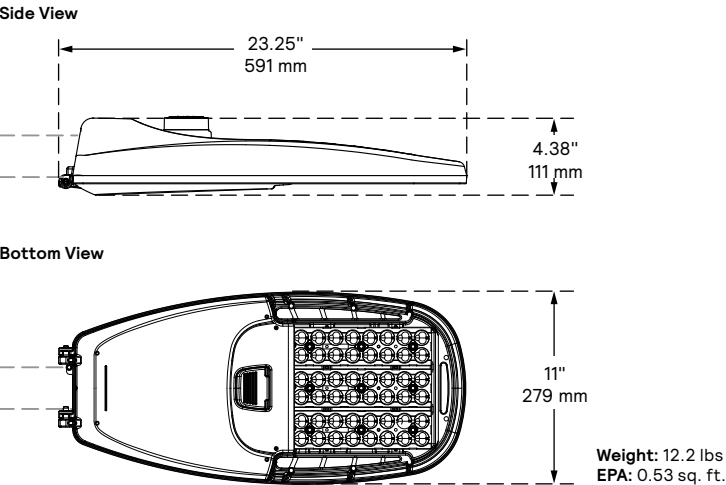

Field Adjustable Wattage (FAWS) Multiplier Chart

FAWS Position	Typical Delivered Lumens Multiplier	Typical System wattage
1	0.31	0.28
2	0.53	0.5
3	0.62	0.58
4	0.7	0.67
5	0.78	0.75
6	0.83	0.81
7	0.89	0.87
8	0.92	0.91
9	0.96	0.95
10	1.00	1.00

Note: Typical value accuracy +/- 5%

Specifications

Housing

Made of a low copper die cast Aluminum alloy (A360), 0.100" (2.5mm) minimum thickness. Fits on a 1.66" (42mm) O.D. (1.25" NPS), 1.9" (48mm) O.D. (1.5" NPS) or 2 3/8" (60mm) O.D. (2" NPS) by 5 1/2" (140mm) minimum long tenon. Comes with a zinc plated clamp fixed by 2 zinc plated hexagonal bolts 3/8 16 UNC for ease of installation. Provides an easy step adjustment of +/- 5° tilt in 2.5° increments. Includes integral bubble level standard (always included). A quick release, tool less entry, single latch, hinged, removable door opens downward to provide access to electronic components and to a terminal block. Door is secured to prevent accidental dropping or disengagement. A clearance of 13" (330mm) at the rear is required in order to remove the door. Complete with a bird guard protecting against birds and similar intruders and an ANSI label as per C136.15-2015 to identify wattage and source (both included in box). Housing (including electrical compartment) rated IP54 per ANSI C136.37.

Light Engine

Composed of 4 main components: LED Module / Optical System / Heat Sink / Driver.

Electrical components are RoHS compliant, IP66 sealed light engine LEDs tested by ISO 17025-2005 accredited lab in accordance with IESNA LM-80 guidelines in compliance with EPA ENERGY STAR, extrapolations in accordance with IESNA TM-21. Metal core board ensures greater heat transfer and longer lifespan.

LED Module: Composed of high-performance white LEDs. Color temperature as per ANSI/NEMA bin 2700 Kelvin nominal (2725 ±145K), 3000 Kelvin nominal (3045K +/- 175K) or 4000 Kelvin nominal (3985K +/- 275K), CRI 70 Min. 75 Typical. Other CCT/CRI also available, consult factory.

Optical System: Composed of high performance UV stabilized optical grade polymer refractor lenses to achieve desired distribution optimized to get maximum spacing, target lumens and a superior lighting uniformity. System is rated IP66. Performance shall be tested per LM-63, LM-79 and TM-15 (IESNA) certifying its photometric performance. 0% uplight and U0 per IESNA TM-15.

Heat Sink: Built in the housing, designed to ensure high efficacy and superior cooling by natural vertical convection air flow pattern always close to LEDs and driver optimizing their efficiency and life. Product does not use any cooling device with moving parts (only passive cooling). Wide openings enable natural cleaning and removal of dirt and debris. Entire luminaire is rated for operation in ambient temperature of -40°C / -40°F up to +50°C / +122°F unless otherwise specified, refer to LED Wattages Values Table.

Driver: High power factor of 90% min. Electronic driver, operating range 50/60 Hz. Auto adjusting universal voltage input from 120 to 277 or 347 to 480 VAC rated for both application line to line or line to neutral, Class I, THD of 20% max.

DMG: Dimming compatible 0-10 volts. The current supplying the LEDs will be reduced by the driver if the driver experiences internal overheating as a protection to the LEDs and the electrical components. Output is protected from short circuits, voltage overload and current overload. Automatic recovery after correction. Standard built in driver surge protection of 2.5kV (min).

Integrated Features

DMG: Dimmable driver 0-10V.

RCD7*: Tool less orientable receptacle with 7 pins enabling dimming and additional functionality (to be determined), can be used with a twist lock Interact City node or photoelectric cell or a shorting cap.

SP1: Surge protection device tested in accordance with ANSI/IEEE C62.45 per ANSI/IEEE C62.41.2 Scenario I Category C High Exposure 10kV/10kA waveforms for Line-Ground, Line-Neutral and Neutral-Ground, and in accordance with DOE MSSLC Model Specification for LED Roadway Luminaires Appendix D Electrical Immunity High test level 10kV/10kA.

Please note that these integrated features always come with RoadFocus luminaire.

* Use of photoelectric cell or shorting cap is required to ensure proper illumination.

RFM RoadFocus

LED Cobra head (medium)

Specifications (continued)

Driver and Luminaire Options

D4I: Zhaga-D4i certified fixture

DALI: Pre-set driver compatible with the DALI control system.

SRD: Sensor Ready Driver including SR communication (used for dimming and other functionalities), 24V auxiliary supply and a logical signal input (LSI) connected to the top NEMA twist lock receptacle and bottom TLRSR receptacle, if this option included/ chosen.

This configuration is compatible with Interact City controllers.

SRD1: Sensor Ready Driver including SR communication (used for dimming and other functionalities) but with 24V auxiliary supply and a logical signal input (LSI) not connected to the top NEMA twist lock. If TLRSR receptacle option included, standard SR communication, 24V auxiliary supply and LSI are connected to the TLRSR receptacle.

OMS: Outdoor Multisensor

FAWS: Field Adjustable Wattage Selector, pre-set to the highest position, can be easily switched in the field to the required position. This reduces total luminaire wattage consumption and reduces the light level – see the FAWS multiplier chart for more details.

Note: It is not recommended to use FAWS with other dimming or controls; if you do, set the switch to position 10 (maximum output) to enable the other dimming or controls. Switching FAWS to any position other than 10 will disable the other dimming or controls.

SP2: 20kV / 10kA surge protection device that provides extra protection beyond the SP1 10kV/10kA level.

NRC: No Receptacle. Fixture is shipped with a cap instead of a receptacle.

NYBC: 4-position terminal block

RCD*: Tool Less orientable receptacle with 5 pins enabling dimming, can be used with a twist lock Interact City or photoelectric cell or a shorting cap.

TLRSR: SR Sensor connector, installed in fixture door. Shipped with protective cover.

PH8: Twist-lock photoelectric cell, UNV (120–277VAC).

PH8/347: Twist-lock photoelectric cell, HVU (347VAC).

PH8/480: Twist-lock photoelectric cell, HVU (480VAC).

PHXL: Twist-lock photoelectric cell, extended life, UNV (120–277VAC).

PH9: Shorting cap.

API: Factory Installed NEMA label, ANSI C136.15–2015 compliant. Consult factory for other labeling needs.

* Use of photoelectric cell or shorting cap is required to ensure proper illumination.

Factory Installed Shield Options

(One per Light Engine)

CSS: Cul-de-Sac Shield. Shields light output on the left and right side of fixture.

FSS: Front Side Shield. Shields light output on the front side of fixture.

HS: House Side Shield. Shields light output to the back side of fixture.

LSS: Left Side Shield. Shields light output on the left side of fixture.

RSS: Right Side Shield. Shields light output on the right side of fixture.

Luminaire Useful Life

Refer to IES files for energy consumption and delivered lumens for each option. Based on ISTMT in situ thermal testing in accordance with UL1598 and UL8750, System Reliability Tool, Advance data and LED manufacturer LM-80/TM-21 data, expected to reach 100,000 + hours with >L70 lumen maintenance @ 25°C. Luminaire Useful Life accounts for LED lumen maintenance AND all of these additional factors including: LED life, driver life, PCB substrate, solder joints, on/off cycles, burning hours and corrosion.

Wiring

The connection of the luminaire is done using a terminal block connector 600V, 85A for use with #2 14 AWG. wires from the primary circuit, located inside the housing. Due to the inrush current that occurs with electronic drivers, recommend using a 10Amp time-delay fuse to avoid unwanted fuse blowing (false tripping) that can occur with normal or fast acting fuses.

Hardware

All exposed screws shall be complete with Ceramic primer seal to reduce seizing of the parts, also offers a high resistance to corrosion. All seals and sealing devices are made and/or lined with EPDM and/or silicone and/or rubber.

Finish

Color in accordance with the AAMA 2603 standard. Application of polyester powder coat paint (4 mils/100 microns) with ± 1 mils/24 microns of tolerance. The Thermosetting resins provides a discoloration resistant finish in accordance with the ASTM D2244 standard, as well as luster retention in keeping with the ASTM D523 standard and humidity proof in accordance with the ASTM D2247 standard.

The surface treatment achieves a minimum of 5000 hours for salt spray resistant finish in accordance with testing performed and per ASTM B117 standard.

LED products manufacturing standard

The electronic components sensitive to electrostatic discharge (ESD) such as light emitting diodes (LEDs) are assembled in compliance with IEC61340-5-1 and ANSI/ESD S20.20 standards so as to eliminate ESD events that could decrease the useful life of the product.

Vibration Resistance

The RFM meets the ANSI C136.31-2018, American National Standard for Roadway Luminaire Vibration specifications for Bridge/overpass applications. (Tested for 3G over 100,000 cycles by independent lab)

Certifications and Compliance

cULus Listed for Canada and USA. Luminaire meets DOE and MSSLC Model Specification for LED Roadway Luminaires. Most versions of RoadFocus LED Cobrahead luminaires are DesignLights Consortium qualified, consult DLC QPL to confirm your specific fixture selection is approved. CCTs 3000K and warmer are Dark Sky Approved. Luminaire complies with or exceeds the following ANSI C136 standards: .2, .3, .10, .14, .15, .22, .25, .31, .37, .41.

Service Tag

Each individual luminaire is uniquely identifiable, thanks to the Service tag application. With a simple scan of a QR code, placed on the inside of the mast door, you gain instant access to the luminaire configuration, making installation and maintenance operations faster and easier, no matter what stage of the luminaire's lifetime. Just download the APP and register your product right away.

For more details visit: philips.com/servicetag

Limited Warranty

10-year limited warranty.

See signify.com/warranties for details and restrictions.

Brackets/Arms

For brackets / arms available with this luminaire, see Lumec 3D for details.