



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

5" VERTICAL COMPACT FLUORESCENT REMODEL HOUSING

13W COMPACT FLUORESCENT LAMP
PL513RE

PRODUCT DESCRIPTION

PL Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs plus additional field-installed lock-down mounting clip • Design for use in non-insulated areas • If installed where insulation is present, the insulation must be pulled back 3" from all sides of the PL housing.

PRODUCT SPECIFICATIONS

Lamp One 13W Quad (4-pin) CFL lamp.

Socket Supplied with spring to accommodate certain trim installations, or can be attached to top of housing for certain trims.

Ballast 120V thru 277V HPF Rapid Start Electronic with end-of-life lamp protection • UL listed/CSA certified.



Trims Trim selection shown on reverse.

Labels UL listed for through-branch wiring and damp locations • Union made AFL-CIO • UL and C-UL Listed • Trims 210, 2130 and 5101 are wet location approved for covered ceiling applications.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.

Product specifications subject to change without notice.

DIMENSIONS

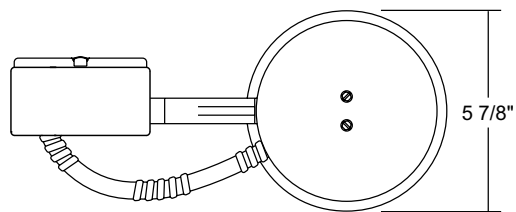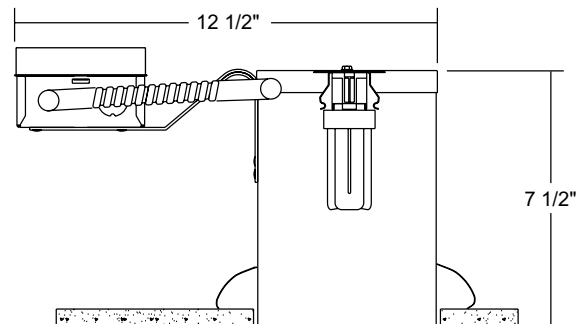

5 1/2" CEILING CUTOUT

INSTALLATION

Junction Box Pre-wired junction box UL and C-UL Listed for through-branch wiring, maximum (4) No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) 1/2" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing .032" aluminum housing • Remodel springs accommodate up to 1 1/8" ceiling thickness.








PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
PL513RE	120V - 277V	13W Quad (4-pin) CFL

5" VERTICAL COMPACT FLUORESCENT REMODEL HOUSING

13W COMPACT FLUORESCENT LAMP
PL513RE

TRIMS/LAMPS

	Cat. No.	Description	Lamp Rating
	210-WH ♦	Lensed Shower/Closet Light	13W Quad (4-pin) CFL
	210-SC ♦	Lensed Shower/Closet Light	
	210-ABZ ♦	Lensed Shower/Closet Light	
	215W-WH	White Baffle, White Trim	13W Quad (4-pin) CFL
	215B-WH	Black Baffle, White Trim	
	216C-WH	Cone - Clear Alzak®	13W Quad (4-pin) CFL
	216G-WH	Cone - Gold Alzak®	
	216W-WH	Cone - Gloss White	
	216HZ-WH	Cone - Haze	
	216WHZ-WH	Cone - Wheat Haze	
	218W-WH	White Baffle, White Trim	13W Quad (4-pin) CFL
	218B-WH	Black Baffle, White Trim	
	219C-WH	Cone - Clear Low Iridescent Alzak®	13W Quad (4-pin) CFL
	219HZ-SC	Cone - Haze	
	219HZ-WH	Cone - Haze	
	219WHZ-ABZ	Cone - Wheat Haze	
	219WHZ-WH	Cone - Wheat Haze	
	2130W-WH ♦	White Baffle Regressed Frosted Dome Lens with Reflector	13W Quad (4-pin) CFL
	2130B-WH ♦	Black Baffle Regressed Frosted Dome Lens with Reflector	
	5101-ABZ ♦	Beveled Frame - Frosted Dome Lens with Reflector	13W Quad (4-pin) CFL
	5101-SC ♦	Beveled Frame - Frosted Dome Lens with Reflector	
	5101-WH ♦	Beveled Frame - Frosted Dome Lens with Reflector	

Trim Size: 6¼" O.D., 5101 is 6½" O.D.

Trim Finish: ABZ - Classic Aged Bronze, SC - Satin Chrome, WH - White.

Alzak is a registered trademark of Alcoa Corp.

Note: In Canada when insulation is present, Type IC fixtures must be used.

♦ UL Listed for use in wet location.